

Counting How the Seconds Count: Understanding Algorithm-User Interplay in TikTok via ML-driven Analysis of Video Content

Maleeha Masood

Siebel School of Computing and Data Science
University of Illinois Urbana-Champaign
Urbana, IL, United States
maleeha2@illinois.edu

Shreya Kannan

Siebel School of Computing and Data Science
University of Illinois Urbana-Champaign
Urbana, IL, United States
shreya28@illinois.edu

Zikun Liu

Siebel School of Computing and Data Science
University of Illinois Urbana-Champaign
Urbana, IL, United States
zikunliu@illinois.edu

Deepak Vasisht

Siebel School of Computing and Data Science
University of Illinois Urbana-Champaign
Urbana, IL, United States
deepakv@illinois.edu

Indranil Gupta

Siebel School of Computing and Data Science
University of Illinois Urbana-Champaign
Urbana, IL, United States
indy@illinois.edu

Abstract

Short video streaming systems such as TikTok, YouTube Shorts, Instagram Reels, etc., have reached billions of active users worldwide. At the core of such systems are (proprietary) recommendation algorithms which recommend a sequence of videos to each user, in a personalized way. We aim to understand the temporal evolution of recommendations made by such algorithms, as well as the interplay between the recommendations and user experience. While past work has studied recommendation algorithms using *textual* data (e.g., titles, hashtags, etc.) as well as *user studies and interviews*, we add a third modality of analysis—we perform *automated analysis of the videos themselves*. To perform such multimodal analysis, we develop a new HCI measurement approach that starts with our new tool called VCA (Video Content Analysis) that leverages recent advances in Vision Language Models (VLMs). We apply VCA on a trifecta of HCI methodologies—real user studies, interviews, and data donation. This allows us to understand *temporal* aspects of how well TikTok’s recommendation algorithm is perceived by users, is affected by user interactions, and aligns with user history; how users are sensitive to the order of videos recommended; and how the algorithm’s effectiveness itself may be predictable in the future. While it is not our goal to reverse-engineer TikTok’s recommendation algorithm, our new findings indicate behavioral aspects that the TikTok user community can benefit from.

CCS Concepts

• Human-centered computing → Social media; • Computing methodologies → Artificial intelligence.

Keywords

TikTok; Algorithmic Experience; Recommender Systems; Short-Form Video; Data Donation; Multimodal Video Analysis

ACM Reference Format:

Maleeha Masood, Shreya Kannan, Zikun Liu, Deepak Vasisht, and Indranil Gupta. 2026. Counting How the Seconds Count: Understanding Algorithm-User Interplay in TikTok via ML-driven Analysis of Video Content. In *Proceedings of the 2026 CHI Conference on Human Factors in Computing Systems (CHI '26), April 13–17, 2026, Barcelona, Spain*. ACM, New York, NY, USA, 22 pages. <https://doi.org/10.1145/3772318.3790311>

1 Introduction

We are seeing an explosion in the popularity of short video streaming applications over the past few years. TikTok, one of the leading short video platforms, reports more than 1 billion users worldwide, with an estimated 82 million active users daily in the US in 2025 [8]. On average, users on TikTok spend nearly an hour per day on the app [20]. Other major social media platforms have also released short video streaming services like Instagram Reels, Facebook Watch and YouTube Shorts. As a result, the overall adoption of short video applications continues to grow worldwide [1, 2, 5].

On TikTok, the “For You Page” is an ongoing algorithmic experience between the short video streaming platform and a user, consisting of a *sequence of videos* appearing to be uniquely personal. Central to this experience is a recommendation algorithm, which generates the user-specific video recommendations. A user watches these videos in the order shown, although they can always skip to the next video by swiping. These algorithms require little explicit input about user preferences, but rather learn about interests through interactions. The recommendation algorithms play a key



This work is licensed under a Creative Commons Attribution 4.0 International License.
CHI '26, Barcelona, Spain
© 2026 Copyright held by the owner/author(s).
ACM ISBN 979-8-4007-2278-3/2026/04
<https://doi.org/10.1145/3772318.3790311>

role in the success of such platforms, but these algorithms remain proprietary.

Existing knowledge about how recommendation algorithms function and interact with users has been largely derived from qualitative accounts of users' personal experiences with short video streaming systems and ultimately, user-constructed folk theories.

Prior human-computer interaction research [15, 17, 21, 26, 33, 40] has found that users develop improvised folk theories (explanatory frameworks, often partial) to make sense of the recommendation algorithm. These user-generated explanations, in turn, shape everyday practices: users attempt to engage in "training" the algorithm by strategically liking, skipping, sharing, searching and commenting on videos, and the user interprets subsequent changes in their feed as personalized responses to specific actions or attributes. Such practices not only encapsulate users' beliefs (mistaken or otherwise) about the system, but they also loop back into the platform, further entangling user behavior, algorithmic inference, and perceived control.

In this work, we *precisely* examine how the recommendation system behaves as it interacts with a user over time, by shifting focus from the *qualitative* experiences of a user to the *quantitative* behavior of the recommendation system itself. We aim to *understand the evolution of recommended content over time and the interplay between the algorithm's output (i.e., recommended videos) and the user experience*. Rather than proposing or deepening HCI theories, we offer a practical HCI measurement approach that is immediately usable by HCI researchers in this fast-moving field. Our approach enables analysis of video content at scale, which is difficult to achieve with existing methods of working with multimodal data. We also show how our HCI measurement approach enables us to unearth several findings that empirically test or challenge widely held folk theories about recommender systems, including the role of user interactions and sequence continuity.

We answer the following research questions (RQs):

- **RQ1** How does the content of recommendations made by TikTok's recommendation algorithm evolve over time at short and long timescales?
- **RQ2** What is the relationship between user interactions (likes and shares) and recommendations made by the algorithm?
- **RQ3** Do users engage more with recommendations that align with their historical video consumption patterns?
- **RQ4** Beyond the videos recommended, does the continuity of the recommended video sequence matter (in terms of user satisfaction)?
- **RQ5** To what extent can we predict whether a user will watch a recommended video using our video analysis pipeline?

Interpreting the RQs: These RQs cover all three entities involved—provider, user, video sequence. Concretely, we study the content of video recommendations from the provider (RQ1), user interactions and preferences (RQs 2-3), and the *sequence* of videos recommended (RQs 4-5).

Alternately, these RQs can be seen as focusing on both past and present histories (RQs 1-4), and also looking forward to the future (RQ5). A third way to see these RQs is that together they

trace the life cycle of recommendations: from how they evolve over time (RQ1), how they respond to user behavior (RQ2–RQ4), and whether they affect engagement (RQ5). Other important questions (e.g., fairness or creator outcomes) are orthogonal to our scope.

Existing Work, and Need for a New Approach: Recent work has attempted to analyze the emergent behaviors of TikTok's recommendation algorithms through several techniques. First, some studies *manually* analyze video content [9, 11, 12] or conduct in-person or online interviews to understand folk theories with respect to the recommendation algorithm [16, 26, 28]. For e.g., manual analysis of 100 videos was used to study the content of climate change-related videos [12]. Manual analysis requires extensive effort and cost, and is hard to scale beyond a few hundred videos. Other work [13, 16] relies on automatic analysis of TikTok browsing histories to conduct large-scale empirical analysis of user interactions in TikTok (e.g., finding that users more likely to '*like*' content posted by creators whom they '*follow*' [67]). This analysis relies on the interactions but does not go deeper towards analyzing video content.

To answer our RQs, we need an HCI measurement approach that has three properties: (i) ability to analyze videos at *scale*, suggesting the need to develop an *automated* way to analyze video content, (ii) *multimodal* analysis combining user studies, interviews, data donation, and automated video analysis, in scientific ways, and (iii) deep analysis of the *content* inside the videos, as opposed to "surface" properties like hashtags which are often misleading.

Analysis of video content at scale is challenging. Some past work has analyzed (i) objects present in videos (e.g., using deep learning models like ResNet) [32], and (ii) video description texts and by using *the video's hashtags* [36] as a proxy for video content. We find both these approaches present a limited view of a video's content. Object detection does not necessarily capture the content of the videos. Additionally, videos containing very different hashtags may talk about the same content. Fig. 1 shows an example of videos with identical hashtags but vastly different content. Hashtags are also unreliable as they are often missing, misspelled, or misleading (i.e., do not match the video content) for a video. Even when available, hashtags may not often capture implicit reasons why a video is attractive, e.g., sarcasm, comedy, etc. Because a user sees a video (and doesn't merely read hashtags), for deeper insights we need to go beyond hashtag-based analysis to analyze the video itself.

A New Video Content Analysis Tool: To perform large-scale automated analysis of video content,

we introduce an automated measurement tool called Video Content Analysis (VCA) that enables content-aware measurement of short video recommendation experiences at scale. We deploy VCA in a *mixed-methods study* involving controlled browsing sessions and large-scale data donation. This enables us to quantify how recommendation content evolves over time, how user actions relate to subsequent recommendations, and how sequence continuity affects user experience. VCA is fueled by recent advances in audio-visual querying capabilities in Vision Language Models (VLMs). Specifically, language models such as Video-LLaMA [69] use transformer models to create an embedding of a video (and its accompanying audio). The embedding enables a language model to a) understand the video and b) interact with users about that video. Such embeddings allow VLMs to not just reason about objects in the video, but

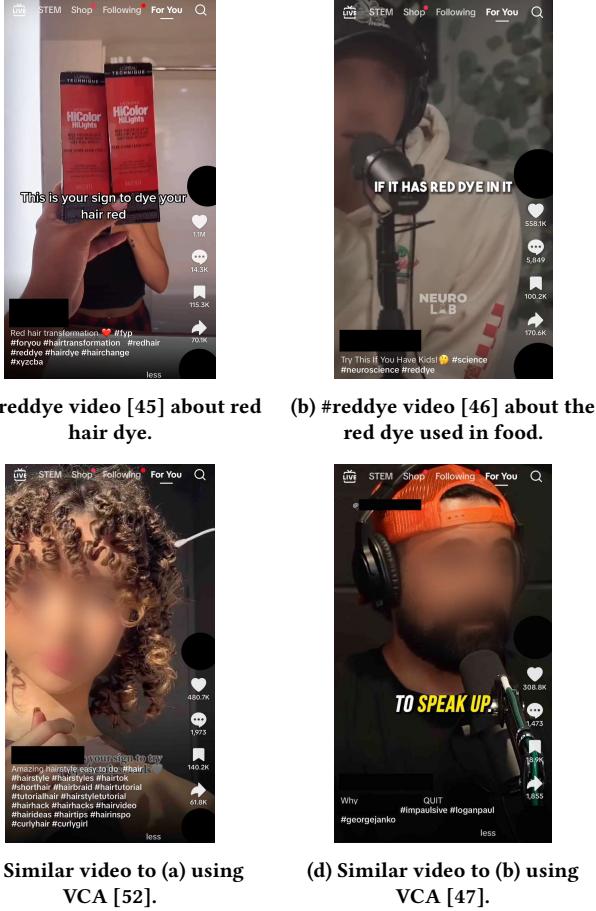


Figure 1: Two TikTok videos that share the hashtag #reddye but refer to different topics: (a) is a video about dyeing hair red while (b) talks about red food dye. The most similar videos to both, found using VCA, are also shown. Note that similar videos do not share the same hashtags but are similar in content. Source: TikTok creators (a) notyourleidy, (b) neurolab_, (c) bestviral5, (d) socialmediamoney.

also their audio-visual dynamics. For instance, using these embeddings, VLMs can generate descriptions like ‘a person is holding a microphone and asking questions to passersby’. Given the rich content captured by these embeddings, they are a natural contender to capture audio-visual dynamics. We exploit these embeddings created by pre-trained transformer models as a mathematical representation of the video content. The *key novelty inside our VCA measurement tool* lies in the application of VLMs to analysis of user behavior (rather than the development of new models via training). **Applying our VCA Tool to Understand TikTok-User Behavior:** With our VCA analysis pipeline, we produce human-interpretable *clusters* that can be used in user-facing explanations, design probes, and audits. We validate the clustering produced with users and confirm that our VCA analysis is grounded in how people perceive content (described in §4.1). VCA allows us to *augment* existing ways of studying user behavior, leading to richer insights than if we used any of these approaches in isolation. More broadly, we view VCA as

a generalizable tool for conducting human-driven analysis of videos (or other multimodal data) at scale, complementing traditional user studies. By summarizing long video histories into interpretable clusters, it allows researchers to explore and validate hypotheses about user behavior without always needing to recruit participants or conduct interviews.

We combine our new VCA methodology with two modalities. (1) We conduct a user study of 68 users, conducted in a mix of in-person and online settings. In these user studies, users browse TikTok in a web browser on macOS computers for ten-minute sessions and rate their level of engagement, content quality, and network/interface quality. (2) We compile a large-scale dataset of browsing histories, via a data donation program, comprising over 2.65 million videos. These techniques, used in tandem, allow us to study the *implications* of the TikTok algorithm across different notions of *time*: both short-term (e.g., do small changes in the recommender algorithm behavior affect user engagement?), and long-term (e.g., how does TikTok’s recommendation evolve over months, for a given user?).

Our findings include both validation of existing folk theories about TikTok, as well as discovery of new findings that go against folk theories. Our key findings are:

- (1) We find that a user spends a large fraction of their time every day on videos that only cover a *small* number of topics. Further, we find that the set of topics of interest for a user changes frequently.
- (2) Our analysis shows that recommended video feeds do not converge toward trending content and recommendations become increasingly individualized over time.
- (3) Contrary to the folk theory that current interactions immediately reshape future recommendations, we find that recommendations do not reflect just-performed actions.
- (4) We find that users like seeing change in the topics of videos they are presented, i.e., a user’s interest never “converges”. This suggests that session novelty improves perceived content quality.
- (5) We find that recommendation sequence matters: dropping a small number of videos from the recommended sequence (unbeknownst to the user) quickly degrades user experience.
- (6) We find that we can use VCA to predict whether a user will watch more than 10% of a video, with an accuracy of 70%. This simultaneously demonstrates the benefits of a content-based representation (through improved prediction accuracy) and the limitations of our ability to predict user interactions which exhibit randomness and agency.

2 Related Work

Understanding algorithm–user interplay on TikTok requires linking insights in and across four areas: (i) how users perceive recommendations, (ii) how researchers have analyzed the TikTok recommendation algorithm, (iii) how researchers have analyzed video at scale, and (iv) Vision Language Models. We discuss these areas and contrast our approach to each area.

2.1 User’s Perception and Awareness of Recommendation Systems

Past work has tried to reason about “black-box” recommender systems that govern their social media feeds [18, 21, 22, 40]. These

papers present folk theories or perceptions that users develop about their interactions with and presence within social media networks.

Multiple user studies have been conducted that specifically aim to learn about theories by TikTok users. A user study including 24 interviews was conducted to study the interactions between TikTok's recommendations and the user's concept of self [28]. Similarly, 15 US-based TikTok users were interviewed using a semi-structured technique to understand their folk theories about TikTok's recommendation algorithm by combining the sense of person and social presence [26]. Vera et al. [62] conduct qualitative interviews to explore TikTok users' perceptions of recommended content on their For You Page (FYP), especially focusing on unwanted recommendations. Because the recommendation algorithms that drive social media feeds today are mostly private, it is hard for users to obtain concrete reasoning about them or validate their existing ones. Our work links interactions directly to TikTok's recommendation algorithm and offers users insights that can help them gain awareness and shape their perceptions about their interactions with TikTok.

2.2 Existing Analysis of TikTok's Recommendation Systems

Several papers have tried to understand TikTok and its users. A data donation program was conducted to gather historical browsing and interaction data from TikTok users to analyze different statistical aspects of user habits such as a user's watch time over an extended timespan (few months), and the relationship between their likes and follows [67]. Building on this work, browsing histories were combined with bot accounts to identify features of the recommendation algorithm such as the trade-off between exploration and exploitation of videos on a user's feed [63]. Other authors conducted a mixed-method study including 28 qualitative interviews with TikTok users and a large-scale analysis of TikTok videos using their hashtags and comments to identify the impact of factors like hashtags and posting time on video popularity [27]. An audit study [36] analyzed the reasoning that TikTok provides on why it recommends a certain video. This reasoning can be accessed via TikTok itself and by using different flavored sock puppet accounts, the paper shows that a significant number of explanations provided by TikTok are illogical and there is a need for more accurate and detailed explanations for the end users. Existing work does not link the longitudinal evolution of a user to their recommendations, nor do they quantify the impact of interactions or modifying the recommendations on the user experience.

2.3 Existing Methodology for Video Analysis

Any work that tries to understand TikTok has to work with large amounts of video data. A category of past work exists that tries to gain insights about video data but is severely limited because their methodology involves authors annotating videos. For e.g., to judge the quality and exposure of news about climate change on TikTok, authors manually go through 100 videos [12]. Another work found 100 trending videos with the hashtag #covidvaccine and analyze videos to understand misinformation and sentiments associated with the topic [11]. Similarly, 200 videos from a corpus of 25000 relevant videos on Douyin were analyzed to understand propagation

and interactions of content related to Intangible Cultural Heritage [64].

There is also some research that uses tools to perform automated analysis of video using machine learning techniques in limited settings, largely using object recognition or activity recognition. For e.g., the cultural differences between TikTok and Douyin (the Chinese variant of TikTok) have been studied using techniques for object detection [42]. Other tools use thumbnails of YouTube videos across 10 countries instead of metadata to discover cultural preferences [70]. Both these works use Faster-RCNN for object detection. In another work, authors develop a video comprehension tool that assists dance learners through automatic dance move identification [23]. Our video content analysis tool combines the depth and content-driven insights of manual analysis with the scale of history-based analysis. In doing so, it removes the scale limitation of manual content-based analysis, while providing rich insights about each video watched by a user. To the best of our knowledge, we are the first to use large generative models for analyzing user recommendations and preferences on short-form video. Our use of large generative models to interpret the entire video provides richer insights compared to analysis provided by object recognition or thumbnails alone.

2.4 Vision Language Models for Video Analysis

Recent advances in Vision Language Models (VLMs) have enabled reasoning over multimodal data like videos. VLMs such as Video-LLaMA [69] use transformer models to create an embedding of a video (and its accompanying audio). Video-LLaMA is built on top of MiniGPT-4 and is composed of two core components: (1) Vision Language (VL) Branch and (2) Audio Language (AL) Branch. The video and audio branches create video and audio embeddings respectively and enable the language model to understand and interact with users about that video. The embeddings allow VLMs to not just reason about objects in the video, but also their audio-visual dynamics (e.g., using these embeddings, VLMs can generate detailed descriptions about videos as seen in Fig. 4).

Prior work has used such models for tasks such as video captioning, retrieval, chatbots [31]; we instead use them as a tool to represent TikTok videos when studying algorithm-user interplay.

3 Methodology: Data Collection and Measurement Design

To retrieve data from TikTok and its users for our analysis, we conduct a user study on a university campus and through online participants. TikTok users mainly interact with the app's recommendation algorithm via their "For You Page" (FYP). Our user study observes a user's interactions with videos recommended on their FYP (§3.1) and also, has an additional (optional) component that allows participants to donate historical activity data that is available to download via their TikTok accounts (§3.2). The user study and historical data collection effort was reviewed by our Institutional Review Board and found to be exempt from a full IRB review. Details about the study are listed in the remainder of the section and further, in the appendix. We note that all our data collection and analysis were completed prior to both (i) TikTok's acquisition by

the US entity, and (ii) the new terms of service that went into effect on January 22, 2026.

We also describe our measurement tool called Video Content Analysis (VCA) that we use to convert each video into a compact vector capturing its audio-visual content in §3.4.

3.1 User Study: Browsing Two TikTok Sessions

3.1.1 Sessions and Questions. Our user study was a 30-minute activity where participants saw their own TikTok For You Page (FYP), the default page that a user is at on TikTok, at <https://www.tiktok.com/foryou>. The participants used TikTok in *two sessions of 10-minutes each* using Google Chrome on a macOS computer. In one of these two sessions, the users saw their original TikTok feed, as recommended by the TikTok algorithm. In the other session, a small fraction of the videos are dropped from the user feed, i.e., a small fraction of randomly selected videos recommended by TikTok's algorithm are hidden from the users. The order of these sessions was randomly assigned.

To enable this study, we built a Google Chrome plugin. Participants are not made aware of the existence (and nature) of the modifications to their FYP we make in the sessions either before the study or after, as approved by IRB protocol. For each session, the participants are expected to scroll through their FYP as they normally would, i.e., they don't have to see all videos entirely. We limit participants from spending time reading comments or browsing outside the FYP.

After the two sessions, participants complete a survey form with questions about demographics, including questions on age, occupation, TikTok join date, and details about their platform usage, and their experiences with both the sessions in terms of their content quality, network quality and their overall engagement levels using Likert scales. In additional questions, an emphasis was also placed on the relative experience between the sessions and we asked questions that ranked the two sessions based on interest, frustrations, historical similarity, and overall satisfaction. The questions we asked are detailed further in the appendix.

To be able to participate in our study, we required an active TikTok account that is regularly used to browse content. We asked the following questions at the time of recruitment and only an affirmation to both questions led to participation.

- (1) Do you have a TikTok account that is at least a few weeks old?
- (2) Do you use TikTok regularly?

Each participant received \$15 as compensation to participate.

3.1.2 Chrome Extension. Our browser extension handles the dropping of videos by modifying the HTML of the TikTok page. To drop videos during the modified sessions, the Chrome extension monitors when TikTok loads new batches of video links (typically 5 to 11 at a time) as users scroll through their FYP. For each batch of newly loaded videos, a percentage of videos were randomly selected, and their HTML was removed, making them hidden to the user.

The extension also extracts video IDs of the videos users actively watched during the two sessions. It does so by querying specific HTML selectors and transmitting the collected data to a back-end server. Our repository of the user study data is the back-end server that allows us to know the videos seen by the participants as well as

additional information like video watch time. Participants with unusually low video view times, significant discrepancies, prolonged engagement with a single video, failure to respond to periodic attention checks, or extended periods of inactivity on the FYP were rejected and excluded from the dataset. Some screenshots of the extension are shown in Fig. 2.

3.1.3 Platform of Study. The same study was conducted (1) in-person on a university campus and (2) online via Prolific [39]. The style of the study and questions asked were the same for both the platforms.

In-person participants were recruited through flyers and posts on social media platforms. At the time of the study, participants used a designated laptop provided by us, with the extension pre-installed. Online participant recruitment was handled by Prolific. Participants used their own macOS laptops and were guided to download the Chrome extension from the Chrome Web Store. Once the study was completed, we instructed online participants who had to download the Chrome extension themselves to uninstall it. We share instructions with them on how to do so. In-person participants need not uninstall the extension since they were using a device designated and set up by us.

We conducted the in-person study between November 2023 and May 2024. The online study was conducted between May and September 2024.

3.1.4 Variants. The user study had three variations depending on the platform and drop percentage we use. We explain the reasoning for the drop modification in §4.5. We choose two drop percentages: 5% (low drop rate) and 30% (moderate drop rate). Details of each variant are shared in Table 1.

- (1) In-person (30% Drop): 30% of videos were randomly dropped in exactly one of the sessions.
- (2) Prolific (5% Drop): 5% of videos were randomly dropped in exactly one of the sessions.
- (3) Prolific (30% Drop): 30% of videos were randomly dropped in exactly one of the sessions.

The actual number of videos that were dropped is decided at runtime based on the number of videos that are recommended as participants scroll. For e.g., assuming 20 videos were recommended at a time, if the drop setting was set to 5%, 1 video was dropped and if drop setting was set to 30%, 6 videos were dropped. Note that this does not decide the total number of videos seen by each participant as they can always scroll further to request more videos from the TikTok server.

For all these variants, the other session (at a random order) was the original TikTok FYP. We don't inform users about the sessions they appeared in - our protocol was approved by IRB. We conducted more user studies than those listed in Table 1 but they are not considered due to concerns like data not recording as expected, set up not done correctly, and invalid variants.

3.2 Historical Activity Files Donation

We requested all participants in our user study to optionally donate their TikTok activity data for an additional \$15 compensation. We had a total of 100 valid donations. TikTok activity data contains files like the browsing history file, like list, and share list. These

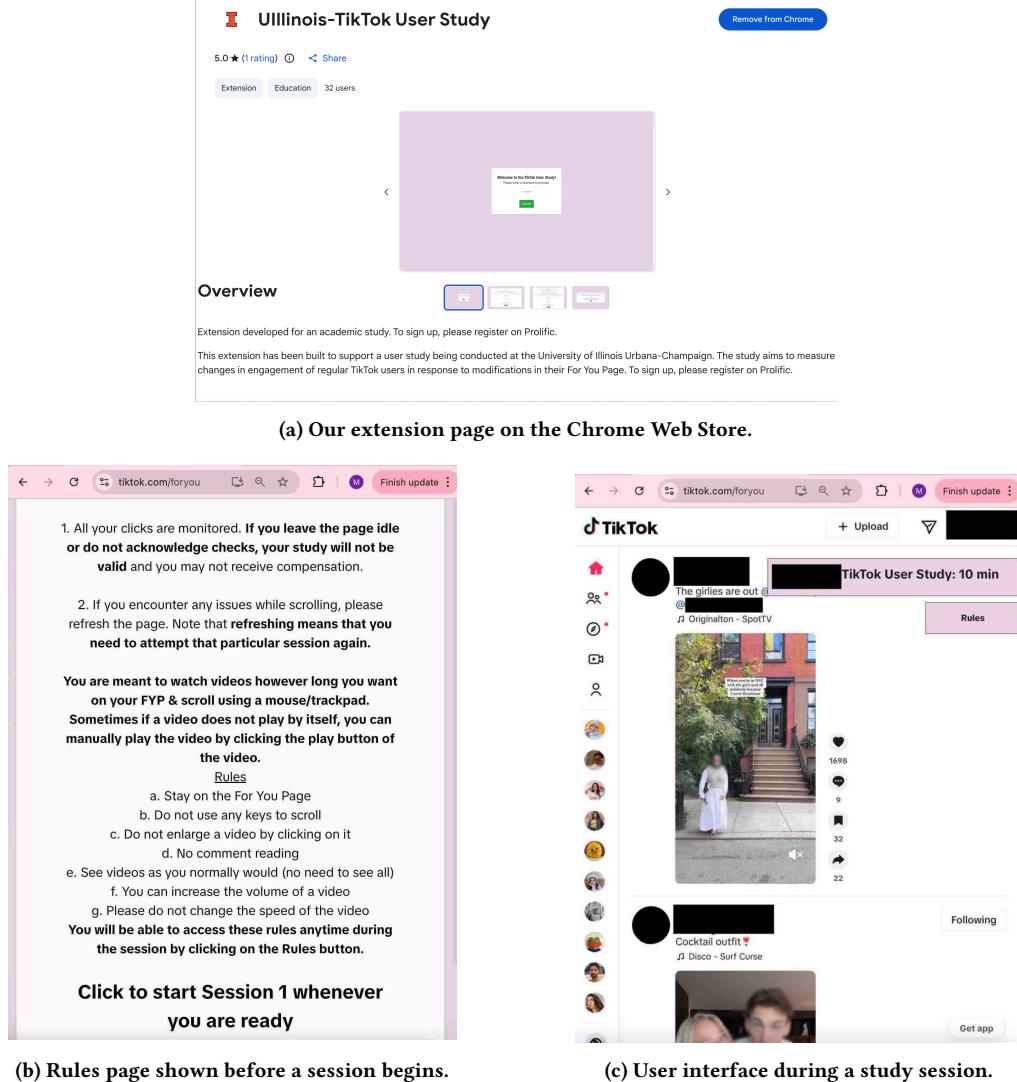


Figure 2: Chrome extension used during the online study. A similar local version was used for the in-person study. Video appearing in (c) by TikTok creator: loren.asad [44].

	Study Condition		
	In-person (30% Drop)	Prolific (5% Drop)	Prolific (30% Drop)
No. of Valid Participants	13	21	34
No. Participants who saw modified session first	8	10	18
No. Participants who saw unmodified session first	5	11	16
Total No. of Unique Videos	543	1321	1900
Average No. of Videos per Session	22.31	31.45	27.94

Table 1: Statistics from the variants of in-person and Prolific user studies.

files contain a record of videos a user has watched or interacted with (typically in the last 6 months) in separate files, along with the date and time each video was viewed, as illustrated in Fig. 3. The browsing history file has an exhaustive list of all the videos seen, and like lists and share lists contain the time and URLs of liked and shared videos respectively. We require at least 1000 videos in the

browsing history files to consider an activity folder as valid. We borrow this data collection technique from [67] to build a database of user profiles. Sometimes, the activity folder misses files, which is beyond both our and the participant's control. We note that the donation activity has more participants because the session preference data from some users was rejected due to reasons mentioned

No. of Valid Participants	100
No. of Unique Videos	3.9M
No. of Videos with Embeddings and Metadata	2.65M
Data Time Range	170–450 Days
Average No. of Unique Videos in a Browsing History File	39K
No. of Valid Participants with Like List	66
No. of Valid Participants with Share History	54
Average No. of Videos Seen in a Day	332

Table 2: Statistics from the browsing history files we collected.

Date: 2023-12-12 12:12:12
Link: www.tiktokv.com/share/video/7313716511095442693/
Date: 2023-12-12 12:12:24
Link: www.tiktokv.com/share/video/7374043158331657504/

Date: 2023-12-14 00:00:07
Link: www.tiktokv.com/share/video/7466011678879010066/

Figure 3: Contents of a browsing history file. This example user watched video 7313716511095442693 for 12 seconds and watched video 7374043158331657504 next for an unknown amount of time. We also do not know the watch time of video 7466011678879010066 from the snippet shared. The like list and share list files also look similar to the browsing history file but only have the links to videos that were liked or shared.

above (failed attention checks, incorrect extension variants, etc.). The historical activity data is valid in spite of these issues, and is therefore retained for these participants.

The Information that Activity Files Provide. Activity files are important to completely understand a user and their interests, and are central to reaching our findings. Using the browsing history file, we can collect key information such as the date and time a user watched a video and the video URL to view the video. We can infer the watch time of most videos (an example is shown in Fig. 3) and, by comparing this time to the video duration, we can get the video watch percentage. Intuitively, metrics like watch percentage are positively correlated to user interests. Like lists and share lists contain the time and URLs of liked and shared videos and these videos are especially important to define user preferences. However, in our data analysis, we note that like lists and share lists are not exhaustive (also noted in [67]). We still use these lists in §4.3 to address folk theories surrounding likes and shares.

For each video, we gather metadata information about them using an open-source unofficial TikTok API [43]. While collecting the data, some videos were either deleted or not publicly available - we ignore these videos. We also use the videos and a VLM (Video-LLAMA, discussed in §3.4), to generate video content embeddings. On average, we successfully collect metadata and embeddings for about 70% of the videos in each user's browsing history. We share some facts about the data donation part of the study in Table 2.

The demographic distribution of our participants is illustrated in Table 3. Approximately 72% of participants watch videos in English, 8% in Spanish, while the remaining view content in various

other languages. About 45% of our participants identify as White/Caucasian, 23% as Asian/Pacific Islanders, 15% as Black/African American, and 12% as Hispanic, with the remaining identifying as other ethnicities. The distribution of participants makes a good effort to mirror that of TikTok's general user base [41], particularly in terms of age (with skew toward a younger audience) and gender, making our collected data a close representation of the platform's audience.

3.3 Ethics

Both our study and data collection effort received an Institutional Review Board's exemption from our university's Office for Protection of Research Subjects under Category 3 (Benign Behavioral Interventions).

At the beginning of our study, all participants were informed of the process of the study and the activity data we were requesting, and were asked to explicitly opt in and consent. Participants were not coerced to share data they did not want to and could change their consent at any time. We showed participants how to download their data from TikTok and then left it up to the participants to analyze the contents of the data and submit it later if they were still comfortable doing so. At the end of the user study session, participants were instructed to log out of their TikTok accounts.

Our goal was to create abstract user profiles that conjoined the user study with the activity data donated - we did not try to obtain more information than what was required (video IDs of videos seen, video watch time, video timeline, liked and shared videos) and were not interested in who the user is in real life. The data we collected was handled only by IRB-approved researchers who had completed relevant training and was stored in a way that facilitated our goal without revealing information using alphanumeric IDs for labeling. We did not attempt to link these IDs to any identifiable information and did not contact participants once we had received the data for our study. All of our data is stored on our lab's server in our university and an additional AWS machine that only we have access to.

We limit ourselves to publicly available videos on TikTok and do not try to access private videos seen by participants. We plan to store all the data we collected for two years after the paper is published, without sharing it with anyone, and deleting it permanently thereafter.

3.4 Video Content Analysis Tool

We now discuss the technical details of how we convert the content of a video to a VCA vector, which is the mathematical representation of the content of a video. This tool enables content-aware

	Category	User Study (Browsing Session)	Activity Data Donation	TikTok
Age	18–24	58	60	36.2
	25–34	33	36	33.9
	35–44	9	4	15.8
	45–54	0	0	7.9
	55+	0	0	6.2
Gender	Male	41	32	45
	Female	59	67	55
	Non-Binary	0	1	0

Table 3: Demographic distribution of the user study participants. The last column shows the distribution of TikTok’s general user base. All numbers are percentages.

measurement of short-video recommendations and, together with user studies and data donation, forms our HCI measurement approach.

3.4.1 Capturing Video Content. Our method of understanding videos is inspired by the “upload video to chat” functionality of some language models [10, 29]. VLMs like Video-LLaMA convert videos to their embedding representation to reason about it.

Given the rich content captured by these embeddings, they are a natural contender to capture the audio-visual dynamics and hence, the content of a video. We exploit these embeddings created by pre-trained transformer models as a mathematical representation of the video content.

Video-LLaMA is an open-source VLM [6].

Since we are able to access its codebase to intercept and record embeddings, it is the language model we use to collect our embeddings. We use the pretrained model available with 7 billion (7B) parameters. Note that there are other much larger VLMs available: Video-LLaMA itself has a 13B version available, DeepMind’s Flamingo VLM consists of 80B parameters etc. Since we work with a pretrained model, collecting our embeddings was not computationally intensive and we were able to do so using Virtual Machine resources available to us at a university campus. An example machine we use to collect embeddings ran Ubuntu 22.04.5 LTS equipped with 1 NVIDIA A40 with memory 48GB. On this machine, we could run 2 parallel instances of the pretrained transformer model. Collecting the embedding of one video took 2 seconds.

Video-LLaMA has separate audio and visual branches that convert audio and video into embeddings of size 8, 4096 and 32, 4096 respectively. We stack these two embedding tensors into a single vector for each video.

Each vector then gets normalized using feature-wise min–max normalization, mapping each feature within the vector to the [0,1] range. The resulting vector captures the content as well as the context of the video. The number of features in the resulting vector is very large. To obtain a more compact representation, we applied Principal Component Analysis (PCA) [66] and reduced the vector size to 100 dimensions. We chose 100 components as a practical trade-off between keeping enough variance in the data and computational cost, that constrains how large an embedding we can store and process efficiently. We refer to this resulting 100-dimensional representation as the VCA vector.

The VCA vector needs to be computed only once for each video. This computation is similar in scale to other common video processing techniques. For e.g., video streaming systems, like TikTok,

already perform compression at video upload time to create different versions of the video for different network conditions and screen types [30].

3.4.2 Clustering Videos. Given the VCA vectors of a large number (millions) of videos, we need to identify different mechanisms to analyze this data. We choose to perform KMeans clustering [37]. KMeans is an unsupervised learning algorithm that partitions a dataset into K clusters, where each data point belongs to the cluster with the nearest mean. For our use case, each VCA vector was a datapoint. We chose an unsupervised clustering approach because (a) it is non-trivial to define a taxonomy of social media videos, and (b) it requires substantial manual effort to manually label millions of videos with clusters.

We selected the number of clusters using the elbow method on a subsample of 500,000 VCA vectors. We plot K-means inertia (i.e., sum of squared distances of samples to their closest cluster center - a lower inertia value suggests better clustering) as a function of K in Fig. 6. We limit K between 10 and 500 to ensure that the final number of clusters is manageable by humans. The curve shows an elbow around $K = 100$, where additional clusters yield only marginal reductions in inertia. We therefore chose $K = 100$ as a trade-off between model fit and complexity.

With $K = 100$, we find that the clustering scheme yields meaningful clusters. Some example clusters and representative videos are highlighted in Fig. 5. Most clusters in our dataset appear coherent, except for 12 clusters. Some examples of identifiable and unclear clusters are in Table 4. All clusters are listed in the appendix.

4 Results and Findings

We address each RQ defined in §1 sequentially by summarizing our key findings first and then explaining the methodology used to conduct our analysis. At the end of each RQ, we also discuss a few implications of our results on the broader HCI domain.

Table 5 outlines the data sources used for the analysis of each RQ. The VCA vectors form an integral component in answering the RQs and in order to verify the alignment of the VCA vector with the video content, we conduct an additional user study that we describe in §4.1.

Identifiable Clusters	Topic
1	Videos of influencers interviewing other people on the streets
18	Videos of people unboxing products and reviewing them; no person is seen on screen
44	Make-up and hair tutorials by female influencers
72	Clippings from talk shows and news rooms
Unclear Clusters	Description
52	Unsure; videos focus on couples and games like Minecraft
65	Unsure; some videos focus on travel, others focus on ASMR videos

Table 4: We classified the videos into 100 clusters. Of these, 12 clusters have topics that are not clearly identifiable, while the remaining clusters are well-defined and easily classified. We provide some examples in the table.

RQ	Data
0	VCA Vectors
1	VCA Vectors, Browsing History
2	VCA Vectors, Browsing History
3	VCA Vectors, Browsing History, User Study Sessions
4	User Study Sessions
5	VCA Vectors, Browsing History

Table 5: The data sources we used to conduct our analysis for each RQ.

4.1 Ecological Validity (RQ0): Are videos within a VCA cluster similar in content?

To validate that the VCA clusters meaningfully group similar videos, we conducted a user study in which participants compared video pairs drawn from within and across clusters.

Key Takeaway: Participants, on average, can differentiate between two videos belonging to the same VCA cluster vs two randomly sampled videos 84.9% (95% CI = [80.5%, 89.2%]) of the time.

4.1.1 Method. We verify that our clustering approach creates meaningful groups of videos by conducting in-person proctored interviews on a university campus (N=22). We recruited participants by advertising the study among students and anyone who watched short videos was eligible. Each participant was shown 44 videos in rounds of 4. The 4 videos were shown in sets of 2 - exactly one of the sets had videos sampled from the same cluster; the other set had videos from different clusters. After watching both sets of videos, participants were asked to pick whether they thought that set 1 had more similar videos or set 2 (we randomly picked which set had similar videos ahead of time). Participants were instructed to identify videos they considered similar, reflecting the way they would judge similarity while watching videos for e.g. similar audio, similar topic, same individuals, etc.

If any video was unavailable (video was deleted or private), users could skip the round. We used all 100 clusters in this experiment. Had we excluded the "unclear" clusters from Table 4, we expect our results may have had even higher accuracy.

Fig. 7 plots a CDF of the accuracy of each participant, measured as the percentage of rounds in which they selected the correct set with same-cluster videos.

We conduct a one-sample t-test comparing participant accuracy against the chance level of 0.5. Participants identified the same-cluster videos with a mean accuracy of 0.85 ($\sigma = 0.10$, 95% CI =

[80.5%, 89.2%]), which was statistically significant, $t(21) = 16.18$, $p < 0.001$.


4.2 RQ1: How does the content of recommendations made by TikTok's recommendation algorithm evolve over time at short and long timescales?

Understanding of the behavior of TikTok's recommendation algorithms for each individual user across time has remained limited. Our Video Content Analysis (VCA) measurement tool in combination with watch history allows us to answer a key insight: for a given user, how does the content of TikTok's recommendations change over varying time scales of days and months?

Key Takeaway: *User watch time is clustered in the short-term, but over long-term these clusters change.* On any single day, about 50% of watch time is focused on the user's top 5 clusters even though about 52.5 clusters ($\sigma = 8.42$) are recommended daily. However, the identity of these top 5 clusters shifts daily. Across six months, users spend only 22% of their time in their top 5 clusters, indicating that while the system exploits heavily each day, the set of exploited clusters rotates over time, producing long-term exploration.

4.2.1 Method. RQ1's analysis is based on the browsing history files that each contain videos recommended to a user over time as well as the watch duration of the video by the user (example in Fig. 3). For each user, we truncate the length of the browsing history to 160 days because about 20% of the users do not have histories beyond 160 days. We also discard all videos with watch time more than 3 times the duration of each video to remove bias (e.g., due to a user moving away from the app). On average, this left us with about 36,000 videos seen by each user.

By clustering the videos in the watch histories using our measurement tool, we are able to identify the top interests of a user by accumulating the time spent watching videos in each of the VCA clusters. To identify a user's top N clusters, we identify the N clusters that they spent the most time watching videos from. For e.g., a user's top 1 cluster is the VCA cluster they spent the most time watching videos from. To obtain the ratios of time spent in these top N clusters, we divide the time spent watching videos in the cluster by the total time spent watching all videos for each user. We find patterns by looking at the clusters recommended to each

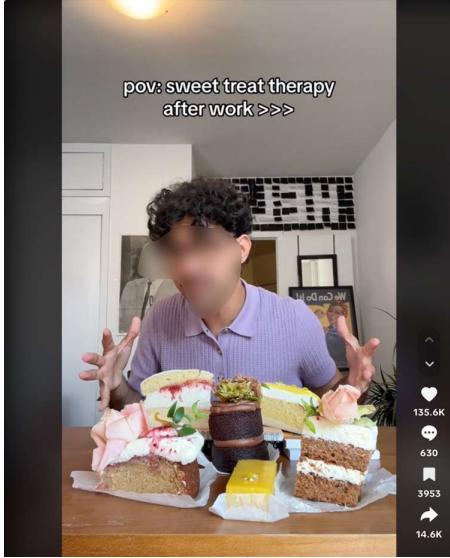

(a) Snapshot of a TikTok video [53] in which a man expresses his love for cake slices after a day at work.

Video-LLAMA

What is happening in the video?


In the video, a man is shown in various shots holding a table with different types of cakes. In the beginning, the man is standing behind a table and there are multiple cakes on display. Later, he moves his hand and changes the position of the cakes on the table. He then sits down at the table with the cakes, and there are different types of candies also visible on the table. Finally, the man makes a gesture with his hand and disappears from the screen.

(b) Description generated by Video-LLAMA when prompted with “What is happening in the video?” after the video in (a) is uploaded to the chat. The response is reasonably accurate and detailed.


Figure 4: Example TikTok video and the description produced by Video-LLAMA for the same video. Video by TikTok creator sodakhtar.

user and the top clusters of each user at both daily and six-month time scales.


4.2.2 Results at the granularity of a day. We find that TikTok’s recommendations for each user spans a large number of clusters. On average, in a single day, TikTok recommends videos spanning 52.5 clusters to each user with a standard deviation of 8.42 clusters. The median number of clusters recommended was 56 (IQR = 45–60) (Fig. 8a). However, as shown in Fig. 8b, a user spends a large fraction

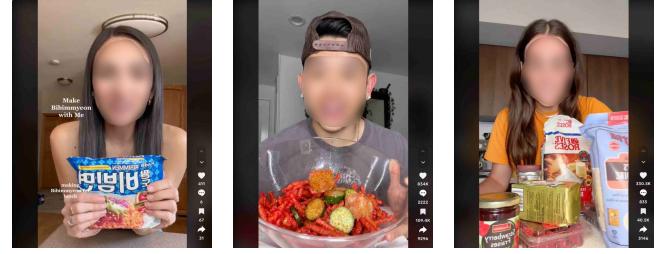

(a) Cluster 39: Videos of people talking to the camera while cooking. Videos by TikTok creators: kindasortasimple [48], thereal.ceyana [54], hey.itsbel [55] (Left-Right).

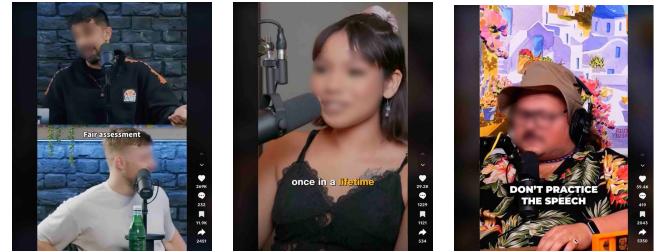

(b) Cluster 47: Videos of people talking into microphones. Videos by TikTok creators: joinsideplus [49], calebhammercomposer [56], stavvysworld [57] (Left-Right).

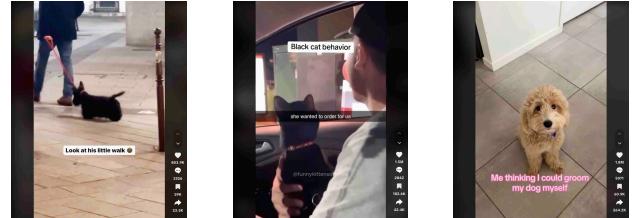

(c) Cluster 48: Videos featuring pets. Videos by TikTok creators: ryflow_people [58], funnykittensoftiktok [59], samaraspaulding [60] (Left-Right).

Figure 5: Examples of videos grouped into the same cluster.

of their time watching videos from just a few clusters. About half the time is spent on videos from just five (that user’s top 5) clusters, and 80% of the time is spent on videos from the user’s top 20 clusters. For all values of N , regression slopes were effectively zero ($|\beta| < 0.0004$), indicating that the proportion of time spent in the top N clusters stayed consistent over time.

At the same time, users’ recommendations experience a lot of churn. In Fig. 8c we find that (for a user) on average, about 4 out of the top 5 clusters are different even between consecutive days. Similarly, an average 70% of top 10 clusters and 62% of top 20 clusters change across any two days.

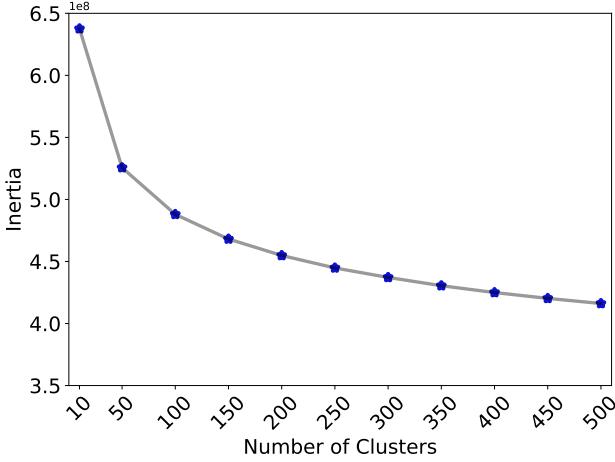


Figure 6: Elbow plot of K-means inertia as a function of the number of clusters K. The curve shows an elbow around $K = 100$, after which additional clusters yield only marginal reductions in inertia.

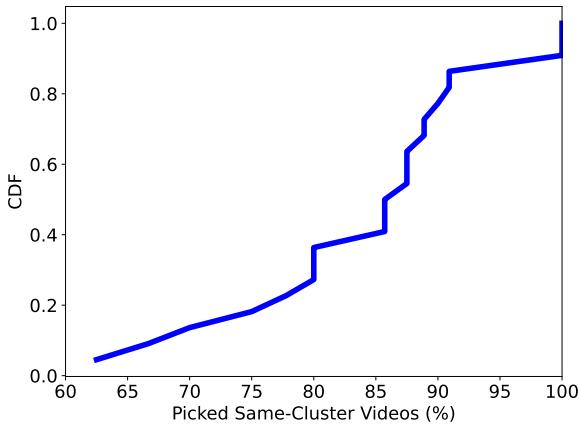


Figure 7: The plot shows the CDF of the percentage of rounds where participants selected videos that were sampled from the same cluster as similar – higher curve indicates better accuracy. Participants can verify that similar videos are in the same cluster on average 85% ($\sigma = 10\%$) of the time.

4.2.3 Results on a 6-month scale. We repeat the same temporal analysis of recommendations across a longer period of 6 months to analyze the time spent by users in their top N recommended clusters across 6 months. The median user spends 21% of their time in videos from top 5 clusters—see Fig. 9. Similarly, a median user spends 33%, 52%, and 83% of their time watching videos from top 10, 20, and 50 clusters, respectively. Comparing these ratios to the day-to-day churn, we observe the time spent in the top 5 clusters is considerably lower in the 6-month study. This substantiates our

observation of churn in the video topics that TikTok recommends to users.

4.2.4 An Extended Insight: TikTok's algorithm tailors recommended videos over time. Any recommender algorithm like TikTok's is aimed at learning about a user over time [24]. Across all users, a trend clearly visible in Fig. 10a is that the average likes received by videos that are being recommended, (i.e., video popularity) decreases consistently with time. We believe this indicates that as TikTok gets to know a user more, it recommends less popular but niche videos. At the same time (despite watching less popular content) the average time spent on TikTok actually *increases* over time (Fig. 10b), indicating stable or increased engagement with the app. Alternatively, TikTok's recommendations become more fine-tuned to the user over time, recommending less popular but more engaging (for the user) content.

4.2.5 HCI Implications. Our analysis shows that recommendations are highly clustered over small timescales i.e., a lot of watch time is spent in only a few recommended clusters. However, the identity of these clusters changes over time and so, long-term behavior spans a much broader set of topics. This observation shows that a user's short video algorithmic experience is inherently multi-timescale: users may inhabit narrow "micro-bubbles" in a given session while still being exposed to diverse content across time. This pattern complicates the usual understanding of "filter bubbles" by revealing both short-term bubbles and long-term diversity in content. This further motivates the need for a) metrics that account for temporal dynamics of diversity, and b) methods that help users understand and navigate how their sequence of video recommendations evolve over time, for e.g., using visualizations of interests across time.

4.3 RQ2: What is the relationship between user interactions (likes and shares) and recommendations made by the algorithm?

TikTok users commonly assume that interacting with a video sends a stronger signal to the algorithm (than, say, merely watching it). This section attempts to unearth this key insight: when a user interacts with a video (like or share): (i) does the interaction affect immediately recommended videos, and (ii) is the video interacted with similar to recently shown videos?

Key Takeaway: Contrary to popular perception, we find that after a user interacts with a video (like or share), there is little change in future recommendations. However, we find that *recently viewed content tends to influence a user's inclination to like or share a video*.

4.3.1 Method. We use the Euclidean Distance metric to quantify distances between VCA vectors, i.e., we measure differences between videos by using our mathematical representation of their contents. A larger distance between videos means that they are further apart in content. Similar videos have a smaller distance between them. Fig. 11 shows three examples of videos—the first two which are similar yield a distance of 28.01 while the third video which is quite different is at respective distances of 58.03 and 57.29. We calculate the distance of a liked (or shared) video with videos recommended right after the interaction (*future*) or the videos recommended right before the interaction (*past*). To get the distance

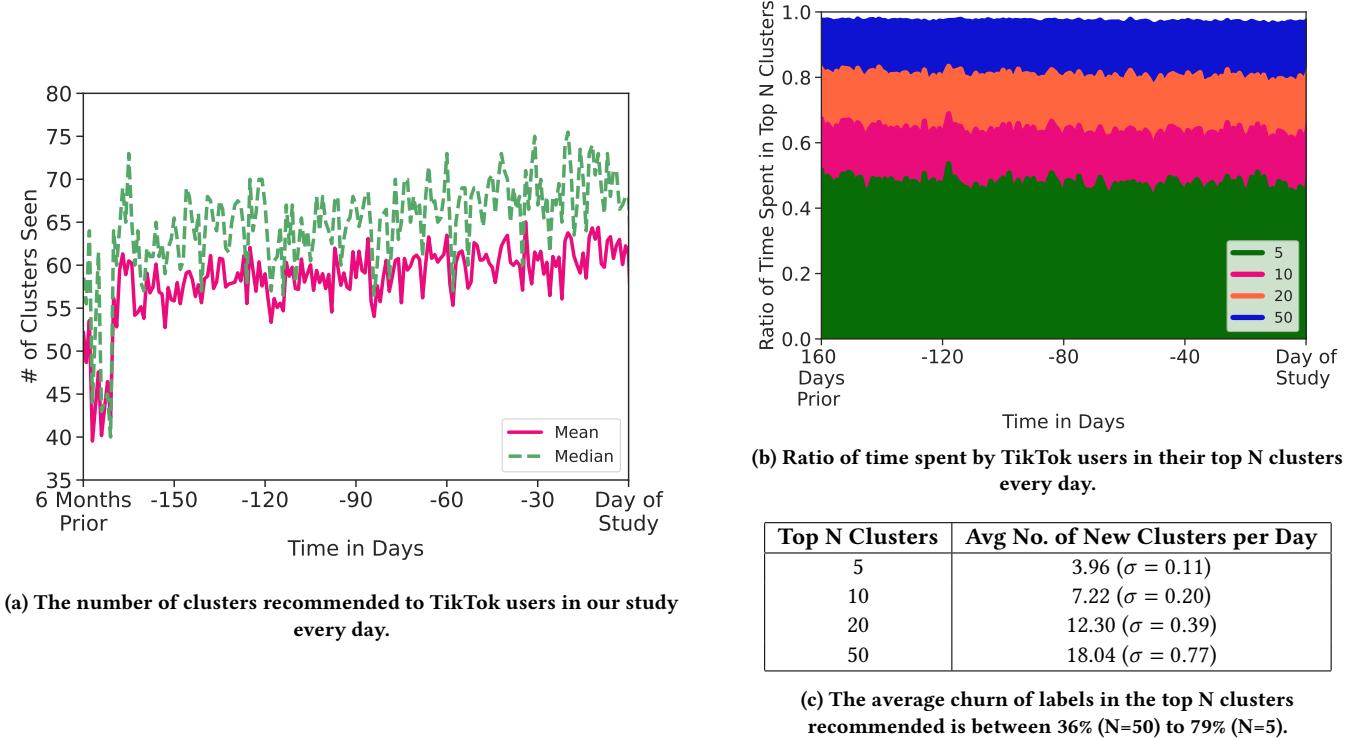


Figure 8: TikTok recommends users a variety of content on a day-to-day basis.

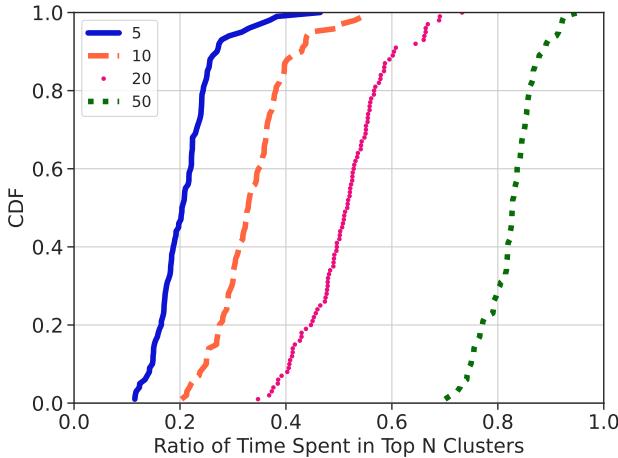


Figure 9: Ratio of time spent by a user in their top recommended clusters over the course of their entire browsing history.

of a video with its neighboring k videos, we calculate the distance of the video with each of its k neighbors that were available.


4.3.2 Folk Theory. We have observed it is common for TikTok users to assume that if they interact with a video such as when they

like, share, or comment on it, their future recommendations are immediately influenced by the contents of the video [3, 4]. We call this the “Post Interaction Anticipation” (PIA) Folk Theory. Past research supports the PIA folk theory qualitatively by reporting user beliefs about interactions with recommendation systems immediately shaping future recommendations [17, 21, 34].

We represent the PIA folk theory using the dashed line in Fig. 12. Before a video is liked (negative video indices), according to the folk theory, the distance of the videos with the liked video should stay relatively constant. However, once a video is liked, users believe that the action impacts their recommendations almost immediately, and subsequent future videos are closer to the liked video i.e., the distance between the videos shrinks. PIA folk theory anticipates that the distance with respect to the *future* videos is smaller than the distance with respect to the *past* videos, showing that recommendations after the interaction were closer to the liked video.

4.3.3 Results. We find evidence *against* the Post Interaction Anticipation (PIA) folk theory. Interacting with a video, we find, does *not* influence immediate recommendations. Fig. 12 shows a clear contrast between the dotted PIA line (expected to drop) and the actual behavior (stable, or increasing). The distances between future videos and the liked video do not shrink, unlike the expectation.

At the same time, we find that the distance of the videos immediately *prior* to the like or share interaction is closer (smaller) to the liked video. This is visible in Fig. 12, and we also see evidence in further detailed analysis of other liked videos in our dataset.

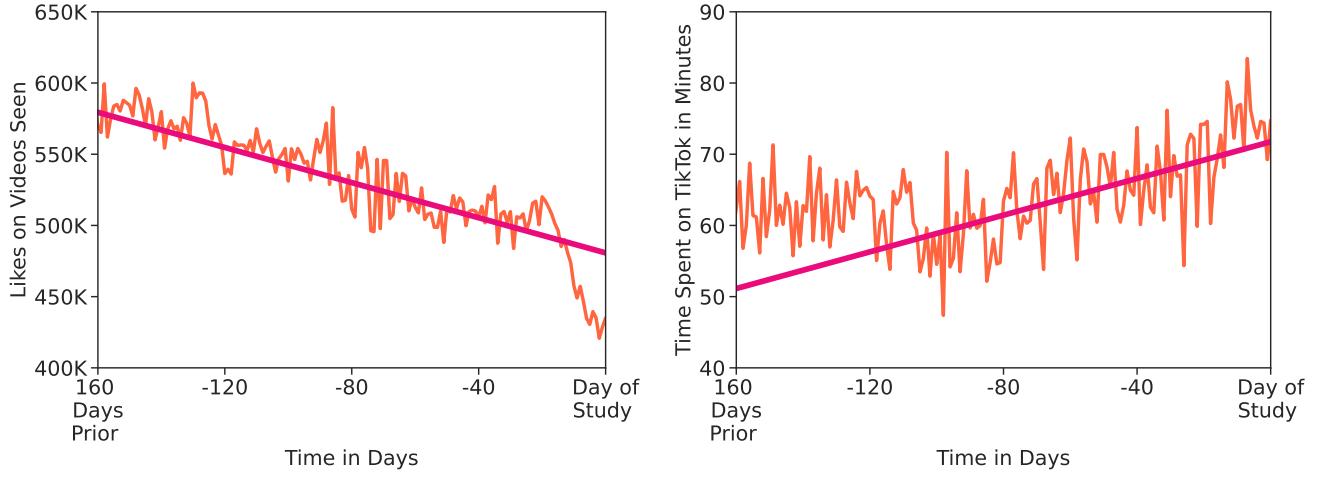

(a) The average likes on videos seen each day decrease over time for all users. Linear regression confirms a statistically significant negative relationship (slope = -617 likes/day, $p < .001$).

(b) The average time spent watching videos increases over time for all users. Linear regression shows a statistically significant positive relationship (slope = 0.128 minutes/day, $p < .001$).

Figure 10: Over time, TikTok users are recommended less popular videos even as their total time spent on the app increases.

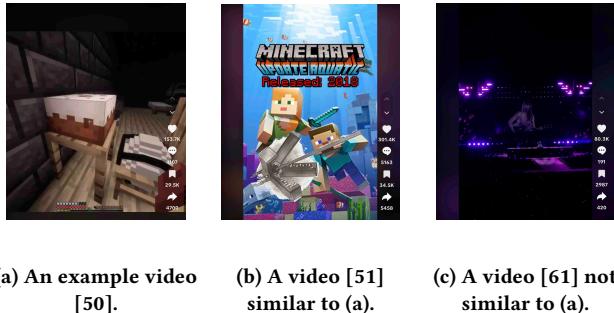


Figure 11: Three example TikTok videos. Videos (a) and (b) are video gaming related, whereas video (c) is from a musical event. The Euclidean distance between the VCA vectors of (a) and (b) is nearly half that between either gaming videos and the event video. Videos by TikTok creators: (a) _miaundrea, (b) nightwing7974, (c) csyrd.

Fig. 13a contains the range of average distance of the set of future videos with the liked video minus the average distance of the past videos to the liked video. The figure shows that majority of the time, videos recommended right before a like event are more similar to the liked video than the videos recommended after a like event. We conduct this analysis with 10, 50, and 100 past and future neighboring videos¹ and conduct a one-sided t-test to test the statistical significance of our result. On average, past videos were closer to the liked video than the future ones. For 10 neighboring videos, the mean future - past distances is 4.60 (95% CI [4.55, 4.63], $t(83,186) = 255.2$, $p < 0.001$); for 50 neighboring videos, 0.78 (95% CI [0.76,


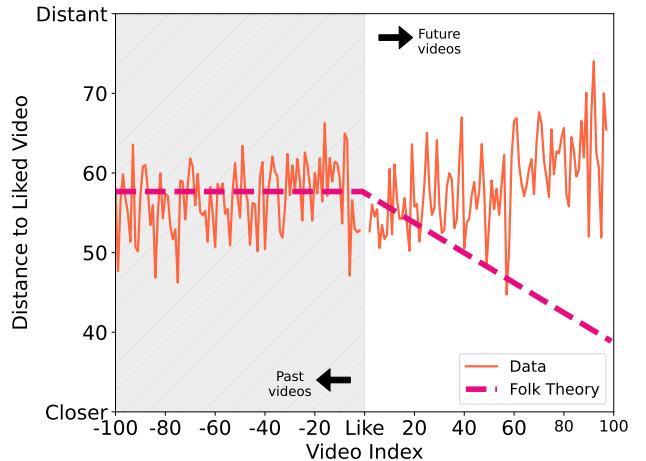


Figure 12: Distance between a real user's liked video and its 100 neighboring videos in the past and future. The expected pattern, based on folk theories, is also shown.

0.80], $t(83,186) = 84.1$, $p < 0.001$); for 100 neighboring videos, 0.35 (95% CI [0.34, 0.37], $t(83,186) = 48.3$, $p < 0.001$). Positive values of the future - past distances indicate that the past videos are closer to the liked video compared to those seen after the interaction and a one-sided t-test confirms that at all sizes of neighboring videos, the past video distances are significantly smaller than the distances of the future videos.

We found this observation also holds for share interactions—see Fig. 13b. The average future - past distance for 10 neighboring videos is 5.34 (95% CI [5.30, 5.38], $t(40,156) = 291.8$, $p < 0.001$); for 50 neighboring videos, 1.07 (95% CI [1.05, 1.08], $t(40,156) = 118.9$, $p <$

¹We observe that typically most users view about 300 videos in a day.

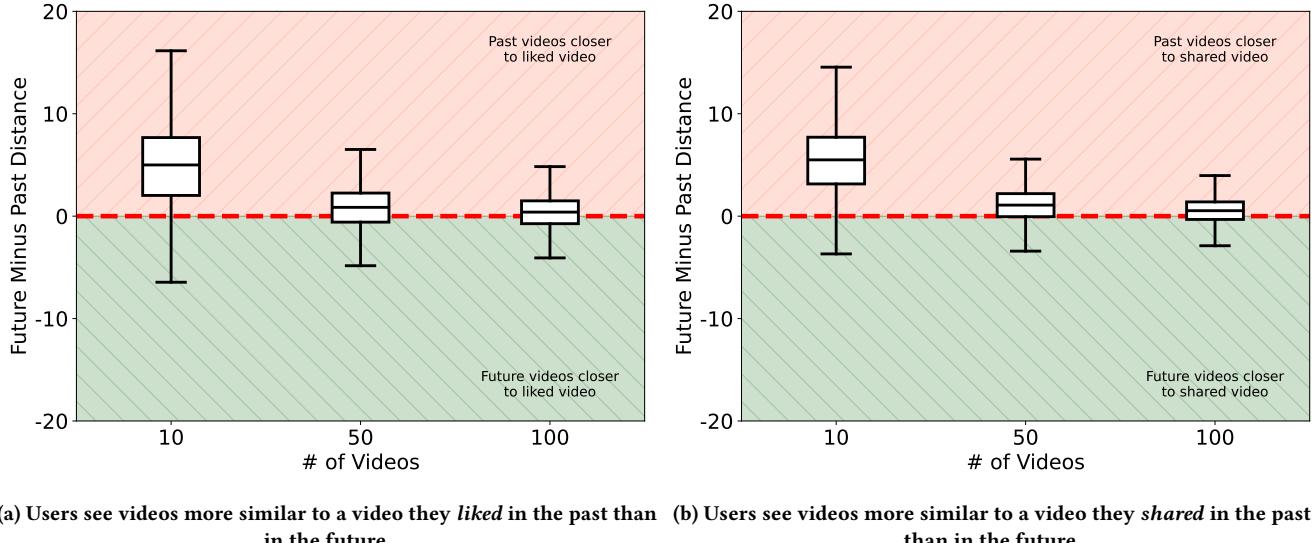

(a) Users see videos more similar to a video they *liked* in the past than in the future. (b) Users see videos more similar to a video they *shared* in the past than in the future.

Figure 13: Once a video is liked/shared, the distance between X (X = 10, 50, 100) videos recommended after does not decrease; i.e., further video recommendations are not close to the liked/shared video. In fact, the past X recommendations are closer to the liked/shared video. In the box plot, the box represents one quartile below and above median, and the whiskers extend to 1.5 the interquartile range.

0.001); for 100 neighboring videos, 0.54 (95% CI [0.52, 0.55], $t(40,156) = 76.5$, $p < 0.001$). This leads us to two possible hypotheses: (a) user interactions are influenced by consistent exposure to a content type—a sequence of similar videos leads to a user interacting with a video of that type, and/or (b) the TikTok recommendation algorithm views an interaction as a peak of engagement and tends to become more exploratory after these events. This allows the algorithm to increase engagement. We demonstrate in §4.4 that users find *fresher* content to be more engaging.

4.3.4 HCI Implications. Our analysis quantifies the distance within sequence of videos recommended to a user before and after a like or share interaction to find proof against the PIA folk theory. This suggests a mismatch between users' perceived alignment with the recommendation system and its actual responsiveness: likes and shares influence further recommendations very little, even though past research shows that users treat them as tuning knobs [17, 21, 34]. We envision researchers working on algorithmic self-presentation to benefit from our analysis. By quantifying the impact of like and share events on the similarity between pre- and post-interaction recommendation sequences, we provide a concrete metric for validating whether interactions truly shift alignment that does not just rely on human feedback. This opens space for empirically comparing alternative feedback designs (for e.g., session-level controls) and evaluating how well they support users in constructing a more faithful self-presentation.

4.4 RQ3: Do users engage more with recommendations that align with their historical video consumption patterns?

Recommendation algorithms are often based on the assumption that past (history) is a good indicator of the future. This section attempts to unearth this key insight: Do user preferences ever converge? When presented with a session that either aligns with or deviates from past videos they have been recommended, which one do they prefer?

Key Takeaway:

Our analysis shows that users rate sessions higher when they have *different content compared to their past histories*, rather than similar content. We find a small but statistically significant positive association between session-level novelty and perceived content quality, suggesting that diversity in recommended content can enhance perceived quality.

4.4.1 Method. Our method of quantifying user engagement is using scores provided by the users in the study described in §3.1. In our study, each participant appeared for 2 sessions that they rated after: unmodified and another session where a percentage of videos was dropped. For the analysis of this RQ, we only use data from the unmodified session of each participant – this is to avoid any biases resulting from dropping of videos. We compare the content quality score, which was a response to the question *Rate session X based on the content quality of the videos that you saw. Note that we are entirely referring to the content of the videos.* The score was provided on a Likert Scale of 1 to 7 with 1 being Very Dissatisfied and 7 being Very Satisfied.

To quantify the deviation from historical recommendations in the browsing history vs. the videos seen in both the sessions of the

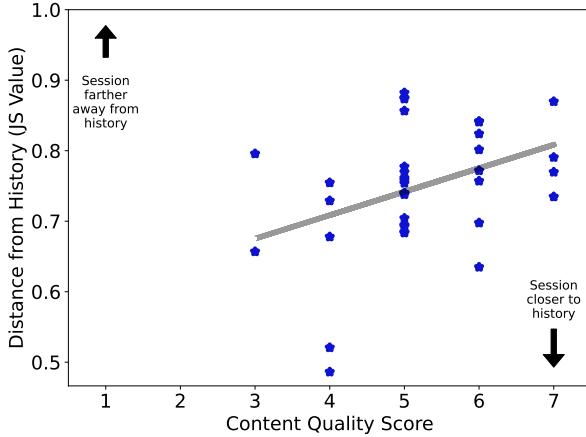


Figure 14: Relationship between the content quality scores a session received and the similarity of the session to historical recommendations. Linear regression analysis estimates the slope to be 0.033, with $p = 0.02$, which is less than 0.05 indicating statistical significance.

study, we use Jensen-Shannon (JS) divergence [35]. JS divergence measures the similarity between the probability distributions of the number of videos in the 100 abstract classes that exist in a user's browsing history and both of their sessions. A smaller JS value means the distribution of videos in the user's history and the session are similar.

4.4.2 Results. One would expect that the session that is the most similar to the browsing history distribution is more preferred and so, would receive a higher score (smaller JS value aligns with a higher score). However, Fig. 14 has an upward sloping trend that goes against this expectation. We find this positive relation between the distance from the history and the content quality score to be statistically significant using linear regression ($p = 0.02$). We conclude that users report a better perceived experience when they see content *different* from content they have seen in the past.

4.4.3 HCI Implications. Our analysis implies that recommending familiar videos to users can disrupt their experience on TikTok. This is in line with existing HCI work [19, 25, 71] that argues for diversity in recommendations. It also suggests that "good" personalization is not about replaying a user's past, but instead, is about creating a mix of familiar and novel content. Moreover, rather than viewing "different from your usual" suggestions solely as a fairness or exploration mechanism, our findings indicate that such recommendations can also enhance users' overall experience.

4.5 RQ4: Beyond the videos recommended, does the continuity of the recommended video sequence matter (in terms of user satisfaction)?

TikTok recommends not just *individual* videos, but also optimizes the *sequence* in which the videos are recommended (again, both parts are proprietary). We attempt to understand: how much does

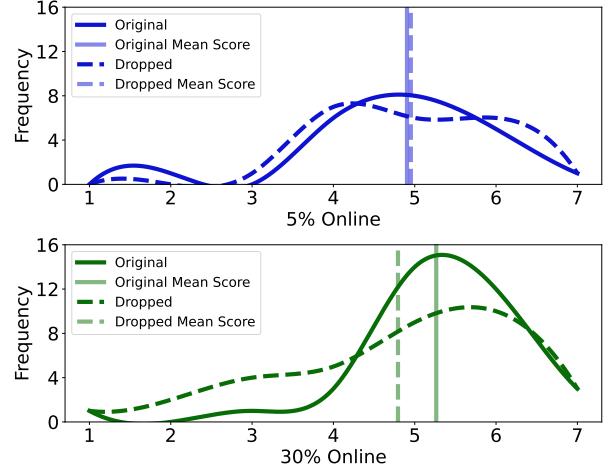


Figure 15: Comparison of engagement scores across original and dropped sessions and the different drop percentages used. A higher number on the Likert scale means a better rating. Top = 5% Drop Session, Bottom = 30% Drop Session.

altering the *sequence* of recommended videos by dropping some from the sequence, affect user experience?

Key Takeaway: We find that while (randomly) dropping a small fraction of videos from the recommended sequence (5%) does not affect user experience metrics, but **dropping a moderate (30%) of the sequence affects user experience**. This suggests that the recommendation cares about not just the content being recommended but the order of videos (even though consecutive videos may appear to be unrelated).

4.5.1 Method. To remind the reader, in our user study of §3.1, users watched two TikTok sessions of ten minutes each. One of these sessions was the unmodified FYP (original session). For the other session, two variants of modifications existed (dropped session): 1. In the first kind, 5% of the videos recommended on the FYP were randomly dropped. 2. The other variant had 30% of the videos randomly dropped. At the end of these two sessions, participants rated both of the sessions based on their engagement with each of the session. Engagement was rated on a Likert Scale of 1 to 7 with a higher score meaning a favorable experience.

We chose dropping videos as our method of disrupting a sequence of videos because it is a realistic scenario. Network issues could lead to buffering of videos that then get skipped. Dropping videos was the most feasible for us to do as it did not involve modifying the recommendation system (which is beyond our control).

The in-person study involved a statistically small number of participants and also lacked the 5% drop variant. Therefore, we focus our analysis on the online version conducted via Prolific.

To statistically validate the differences observed in the modified and original sessions, we perform the Wilcoxon signed-rank test [14]. This non-parametric test does not assume a normal distribution and is appropriate for the comparative ordinal data we collected through our 7-point Likert scale questionnaire. The Wilcoxon test tests whether the median difference between original and modified

session scores is zero, and so, effectively determines whether participants exhibited a preference for one over the other. Past works also use the test for similar evaluations [65].

4.5.2 Results. The engagement scores are summarized in Fig. 15. We first discuss the 30% dropped experiments. We note that users find the modified version with 30% dropped videos less engaging. The mean score, and the distribution of scores, plotted in the bottom plot in Fig. 15 validate this point - a Wilcoxon signed-rank test revealed a statistically significant difference ($W=0.0$, $p<0.001$) between the engagement scores of the original ($\mu = 5.26$, $IQR=[5,6]$) and 30% dropped sessions ($\mu = 4.79$, $IQR=[4,6]$). This is a surprising finding—users are not aware that one of these sessions has been modified and can browse an infinite sequence of videos. Therefore, we expected users to have an identical experience.

In sessions with just 5% video drops (top graph in Fig. 15), we do not observe the same difference in engagement scores. These sessions compared to the unmodified sessions had statistically insignificant difference ($W=2.0$, $p=0.6$) in engagement scores (Original $\mu = 4.90$, $IQR=[4,6]$, Dropped $\mu = 4.95$, $IQR=[4,6]$)

indicating that it is harder for users to perceive very small changes in the recommendations and their sequence.

We hypothesize a possible reason for this phenomenon: TikTok's recommendation algorithm applies temporal logic in placement of videos, e.g., to not place many similar videos next to each other. Such temporal logic can break due to random drops. With a 30% drop rate, the sequence of videos gets impacted more significantly and so, we note a greater drop in engagement.

4.5.3 HCI Implications. Our analysis identifies a tolerance band within which external changes to the sequence of recommendations remain effectively invisible to users. For HCI, this relates directly to how much designers can safely modify or experiment with sequential recommendations (for exploration, fairness, etc.) without harming perceived quality. Furthermore, even though consecutive videos in a recommended sequence often appear to be unrelated, our findings suggest that the recommendation algorithm creates a medium-term or long-term “continuity” across a sequence. This warrants further study by the research community (especially IR/information retrieval), as it opens a new understudied dimension of recommender output.

4.6 RQ5: To what extent can we predict whether a user will watch a recommended video using our video analysis pipeline?

Finally, we ask whether the video-content representations produced by VCA offer predictive value for user engagement. Specifically, we examine the extent and limits of predictable structure in short video viewing behavior.

Key Takeaway: We find that the use of VCA vectors provides additional, but limited, predictability in user watch behavior. The maximum accuracy is 69.65%, demonstrating that user behavior is hard to predict.

4.6.1 Method. Past works have shown that user preference and behaviors in commercial short video streaming platforms are extremely hard to predict due to the complexities of the human

decision-making and large number of factors influencing user interactions [30, 38, 68]. We use content vectors derived from our VCA technique to capture the semantic and contextual nuances of the videos, and explore the benefit that rich video-content representations can provide, if any.

Feature Group	List of Features
VCA Vectors (V)	Embeddings Vectors (PCA)
Time (T)	Hour of the Day + Day of the Week + Month
User Status (U)	User Name + No. Videos Watched + Time Watched

Table 6: Input features of user prediction include three feature groups.

We model the problem of whether a user will stay on a video and see or just swipe as a binary classification problem. Our dataset contains 3,870,540 data points and we split the training and testing dataset with a ratio of 8:2. To train our model, we obtain the ground truth label by checking the ratio of the video that the user watched and set the threshold to be 10%, meaning that if a video is watched by this user for less than 10%, we classify this video as not interesting to the user. We choose a threshold of 10% because it yields a balanced classification problem, i.e., 50% of videos in our dataset were watched over 10%.

We leverage the random forest algorithm for our task. The input features are shown in Table 6. We compared several standard classifiers on a validation set: logistic regression, a linear SVM, neural network, and a random forest.

All models used the same features as input. The random forest achieved the best performance and, we therefore report these results only. We set the random forest algorithm to have 120 estimators based on validation set accuracy.

We embed the user names using one-hot encoding and include the number of videos and the time that user has been watching so far during that video scrolling session. Our choice of features reflects both the constraints of the available data and insights from publicly reported factors that affect short video watch time [7].

4.6.2 Results. The prediction results with different feature group input combinations are shown in Table 7. With all feature groups included, the model achieves the highest accuracy of 69.61%, along with the best F1 score (0.724) and AUC-ROC (0.795). To evaluate the contribution of each feature group, we systematically removed one feature group at a time and analyzed the impact on performance. We find that removing the VCA vectors results in the most significant decline, with a 3.13% drop in accuracy, as well as noticeable reductions in F1 score and AUC-ROC, making it the most crucial feature group. In contrast, the User Status and Time features have a less pronounced effect compared to the VCA vectors.

4.6.3 HCI Implications. The modest but consistent gains from VCA vectors suggest that semantic representations of videos contribute to engagement prediction, yet they leave a substantial portion of user behavior unexplained. This points to two implications: first, such content-based representations can provide researchers with a

Feature Groups	Accuracy (%)	Accuracy Delta (%)	F1 Score	AUC-ROC
V + T	69.65	+0.04	0.703	0.771
V + U	69.53	-0.08	0.711	0.785
T + U	66.48	-3.13	0.681	0.757
V + T + U	69.61	0	0.724	0.795

Table 7: Classification performance under different feature groups.

valuable lens into an otherwise opaque recommendation system. Second, content-based explanations (“you are seeing this because it is similar to videos you watched”) of algorithmic experience capture only part of the story and user interactions exhibit randomness beyond these features.

5 Discussion and Implications

Apart from the “HCI Implications” embedded into each of the respective RQ subsections above, we now note a few additional implications for users, for algorithm design, for long video in general, and for researchers who may want to extend VCA.

Implications for Users. A common fear among online users (including TikTok users) is that interacting with a video will change their set of seen videos and take them into unknown topics or topics that they would like to avoid. But our finding from RQ2 (§4.3) of long-term impact on the algorithm, indicates that such interaction does not affect upcoming recommendations, but instead is a *result* of past recommendations. This indicates that users who do not want to interact with TikTok content but feel compelled to do so, may be able to curate their interaction urges by introspecting about recent “similar” videos they may have seen. Further, our findings indicate that users need not feel helpless at the mercy of the algorithm—the slow reaction from TikTok algorithm shows that users still have time to “steer” the algorithm. Even after a negative interaction with a video, users are not “stuck” into topics due to our finding from RQ1 that TikTok’s recommended topics to a user are highly dynamic.

Implications for Recommendation Algorithm Design - I. A common misconception among designers of personalized recommender algorithms is that the goal of the algorithm’s learning is to converge to what the user prefers. This is evident in recommender algorithms for music apps (e.g., Pandora, YouTube Music, etc.), where the set of recommended audios converges (and stops recommending new audios, except in corners of the feed). Our finding that users like change (RQ3, §4.4) indicates that the goal of algorithms must be to “continuously learn” as opposed to converge. TikTok’s churning recommendations (RQ1, §4.2) is indicative that its algorithms are cognizant of this fact.

Implications for Recommendation Algorithm Design - II. While available documentation appears to indicate that TikTok’s production algorithm largely relies on hashtags, our findings (especially RQ5 in (§4.6)) indicate that deeper video content-based recommendations may be closer to user preferences. Short video systems should likely consider recommender algorithms that account for video content. While this implies additional computational cost, the cost is limited—the embedding for a video needs to be computed

only once at upload time, similar to how a codec already generates multiple resolutions of the uploaded video for different network qualities and screen types.

Implications for Long Form Video. Designers of long-term multimedia systems (e.g., movie streaming, TV content, YouTube, Netflix, etc.) rarely focus on the sequences of video delivery (which video is watched after which). Our finding from RQ4 indicates that sequence matters to the user. This implies that designers of all video services (not just short videos) including long videos, movie channels on TV, etc., will need to pay attention to the sequence of content delivered. It is common, for instance, for television channel hosts to “handover” to the next host, or for “lead in” programs (e.g., a live talk show right after a game or awards ceremony, or a pilot episode of a new series premieres right after a popular established series’ episode). More study is needed whether *longer* sequences (more than just two back-to-back videos) of such content affect user experience in long form videos. Understanding the implications of this question in both pull-based systems (e.g., YouTube, Netflix) as well as push-based systems (e.g., TV, movie streaming) is an open direction.

Implications for Researchers. VCA can be used as a new measurement instrument to analyze video content beyond short video systems. The recent growth of multimodal Vision Language Models further enriches the VCA pipeline. Our research demonstrates that VCA allows us to reason about video content, rather than just video statistics, at scale. Researchers can use this approach for answering research questions related to recommendation systems in both short and long video domains. More broadly, this research can also be used for new applications such as content moderation, content querying (e.g., to surface similar or different videos), and popularity analysis.

VCA as a generalizable HCI Tool. We envision our VCA analysis pipeline to be a reusable HCI tool that can benefit other researchers working on users interacting with multimodal data. VCA allows us to convert a sequence of multimodal data (videos in our case) into human-interpretable clusters. By doing so, VCA converts a large sequence of data into manageable units that can be visualized across time allowing both sequence-level and temporal analysis of multimodal data. This can power dashboards showcasing dominant user interests over time and allow analysis of cluster transitions relation to user engagement. It also allows researchers to study multimodal data at the granularity of a sequence.

6 Limitations

In our HCI measurement approach, we use our VCA pipeline in combination with our user study and data donation effort to validate our five research questions. We note the following limitations within our user studies, VCA technique and analysis.

6.1 User Study

- Most of our user study participants were aged 18 to 34. While this age range does significantly dominate on TikTok [41], older users do exist on the app. The skew in age of our population likely arose from two factors: a) recruitment on a university campus, and b) age of the typical survey taker on Prolific.
- In our user studies, participants browsed TikTok in a web browser on macOS computers. The default mode for users is the TikTok mobile application. Given our inability to modify the mobile app or programmatically collect statistics, we limit our study to a web browser. Additionally, due to the way our extension was designed, our user study was limited to participants with macOS laptops. Our use of both the Chrome extension and web browser to simulate TikTok interactions potentially reduces the ecological realism of a TikTok user's experience and may limit the generalizability of our findings. Some of our respondents reported in their comments that the form factor (on browser) was unfamiliar and may have affected their overall level of engagement—however we note that such users reported the effect on both their 10-minute browsing sessions.
- While we conducted a user study to validate that VCA clusters group together meaningfully similar videos, the evaluation is based on a moderate sample size consisting mostly of students and subjective judgments. A more diverse study may yield different results.

6.2 VCA Technique

- A component of our algorithmic analysis relies on clustering of videos into abstract clusters. The unsupervised clustering approach removes any labeling biases. However, the cluster definitions are abstract and data-driven. Future work could exploit other supervised clustering approaches.
- Our choice of 100 clusters is driven by our manual pre-analysis of meaningful clusters and verification using external volunteers. Our analysis also assigns only one cluster to each video. In principle, soft clustering (i.e., assigning a video to multiple clusters) or a deeper or different manual pre-analysis may yield different clusters, although we do not expect it to change our overall conclusions.
- We utilized the pretrained Video-LLaMA model for generating embeddings from videos. A large generative model trained specifically on TikTok videos may yield different, and perhaps more informative, set of embeddings.
- We focus on audio and visual embeddings to represent TikTok videos and capture their content. Text transcripts can sometimes be error-prone (noisy environment, unclear voice-overs, music lyrics) and absent in TikTok videos, and their contribution is largely redundant with the audio modality.

6.3 Analysis

- Participants in our user study joined TikTok at different times, which may influence their usage patterns or platform engagement and in turn, impact our analysis. To address this limitation, we standardized timelines by measuring activity relative to each participant's study date.
- Our analysis is generally conducted at the group level to examine the overall trend. Individual level analysis can investigate heterogeneities in people's TikTok usage behavior.

7 Conclusion

Short video platforms are now central to everyday media consumption, yet the mechanisms by which their algorithms shape user experience remain difficult for researchers to observe and evaluate. In this work, we presented a new HCI measurement approach which combines a new tool for automated Video Content Analysis (VCA), along with large-scale data donation, and controlled user studies. This trifecta offers a multi-faceted account of how a recommendation system interacts with user history, behavior, and perception, and unearth five insightful results about the algorithm-user interaction.

Some of our conclusions run contrary to folk theory (e.g., user interaction is more correlated with *recently seen* videos, and less to *upcoming* recommended videos), while other results of ours point to the need to rethink fundamental assumptions of personalization (e.g., we find users like change, and a user's interests never converge), while yet other findings of ours provide the first quantitative evidence of phenomena (e.g., the sequence of videos recommended matters; users like change). Across these contributions, we demonstrate how integrating multimodal content representations with user-centered methodologies can surface new insights about algorithm-user interaction. We hope this work opens pathways for future research that uses VCA not only as an analytic lens but also as a basis for developing more transparent, controllable, and user-aligned recommendation experiences.

Acknowledgments

We thank the anonymous reviewers and Associate Chairs for their valuable feedback. The work in this paper was funded in part by NSF Grant CNS 2504595, and in part by a gift from Microsoft.

References

- [1] 2023. *Short Video Platforms Market (2023 - 2030)*. <https://www.grandviewresearch.com/industry-analysis/short-video-platforms-market-report>
- [2] 2024. *8 facts about Americans and TikTok*. <https://www.pewresearch.org/short-reads/2024/12/20/8-facts-about-americans-and-tiktok/>
- [3] 2024. *How TikTok recommends content*. <https://support.tiktok.com/en/using-tiktok/exploring-videos/how-tiktok-recommends-content>
- [4] 2024. *How TikTok's Algorithm Works in 2024*. <https://tinuiti.com/blog/paid-social/tiktok-algorithm/>
- [5] 2024. *TikTok's meteoric rise and the call for regulation*. <https://www.rmit.edu.vn/news/all-news/2024/jul/tiktoks-meteoric-rise-and-the-call-for-regulation>
- [6] 2024. *What is an open source LLM?* <https://www.redhat.com/en/topics/ai/open-source-lm>
- [7] 2025. *Instagram Feed Recommendations AI system*. <https://transparency.meta.com/features/explaining-ranking/ig-feed-recommendations/>
- [8] 2025. *TikTok Statistics You Need to Know*. <https://backlinko.com/tiktok-users>
- [9] Adam Alley and Jody Hanshew. 2022. A long article about short videos: A content analysis of U.S. academic libraries' use of TikTok. *The Journal of Academic Librarianship* 48, 6 (2022), 102611. doi:10.1016/j.acalib.2022.102611

[10] Kirolos Atallah, Xiaoqian Shen, Eslam Abdelrahman, Essam Sleiman, Deyao Zhu, Jian Ding, and Mohamed Elhoseiny. 2024. MiniGPT4-Video: Advancing Multimodal LLMs for Video Understanding with Interleaved Visual-Textual Tokens. *arXiv preprint* (2024). doi:10.48550/arXiv.2404.03413

[11] Corey H. Basch, Zoe Meleo-Erwin, Joseph Fera, Christie Jaime, and Charles E. Basch. 2021. A global pandemic in the time of viral memes: COVID-19 vaccine misinformation and disinformation on TikTok. *Human Vaccines & Immunotherapeutics* 17, 8 (2021), 2373–2377. doi:10.1080/21645515.2021.1894896

[12] Corey H. Basch, Bhavya Yalamanchili, and Joseph Fera. 2022. #Climate Change on TikTok: A Content Analysis of Videos. *Journal of Community Health* 47 (2021), 163–167. doi:10.1007/s10900-021-01031-x

[13] Maximilian Boeker and Aleksandra Urman. 2022. An Empirical Investigation of Personalization Factors on TikTok. In *Proceedings of the ACM Web Conference 2022 (WWW '22)*. Association for Computing Machinery, New York, NY, USA, 2298–2309. doi:10.1145/3485447.3512102

[14] William J. Conover. 1999. *Practical nonparametric statistics*. John Wiley & Sons.

[15] Michael Ann DeVito. 2021. Adaptive Folk Theorization as a Path to Algorithmic Literacy on Changing Platforms. *Proc. ACM Hum.-Comput. Interact.* 5, CSCW2, Article 339 (Oct. 2021), 38 pages. doi:10.1145/3476080

[16] Michael Ann DeVito. 2022. How Transfeminine TikTok Creators Navigate the Algorithmic Trap of Visibility Via Folk Theorization. *Proc. ACM Hum.-Comput. Interact.* 6, CSCW2, Article 380 (Nov. 2022), 31 pages. doi:10.1145/3555105

[17] Michael Ann DeVito, Jeremy Birnholtz, Jeffery T. Hancock, Megan French, and Sunny Liu. 2018. How People Form Folk Theories of Social Media Feeds and What It Means for How We Study Self-Presentation. In *Proceedings of the 2018 CHI Conference on Human Factors in Computing Systems (CHI '18)*. Association for Computing Machinery, New York, NY, USA, 1–12. doi:10.1145/3173574.3173694

[18] Michael Ann DeVito, Darren Gergle, and Jeremy Birnholtz. 2017. "Algorithms ruin everything": #RIPTwitter, Folk Theories, and Resistance to Algorithmic Change in Social Media. In *Proceedings of the 2017 Conference on Human Factors in Computing Systems (CHI '17)*. Association for Computing Machinery, New York, NY, USA, 3163–3174. doi:10.1145/3025453.3025659

[19] Patrik Dokoupil, Ludovico Boratto, and Ladislav Peska. 2024. User Perceptions of Diversity in Recommender Systems. In *Proceedings of the 32nd ACM Conference on User Modeling, Adaptation and Personalization (UMAP '24)*. Association for Computing Machinery, New York, NY, USA, 212–222. doi:10.1145/3627043.3659555

[20] Fabio Duarte. 2024. *Average Time Spent on TikTok Statistics* (2024). <https://explodingtopics.com/blog/time-spent-on-tiktok>

[21] Motaahhare Eslami, Karrie Karahalios, Christian Sandvig, Kristen Vaccaro, Aimee Rickman, Kevin Hamilton, and Alex Kirlik. 2016. First I "like" it, then I hide it: Folk Theories of Social Feeds (CHI '16). In *Proceedings of the 2016 CHI Conference on Human Factors in Computing Systems*. Association for Computing Machinery, New York, NY, USA, 2371–2382. doi:10.1145/2858036.2858494

[22] Motaahhare Eslami, Aimee Rickman, Kristen Vaccaro, Amirhossein Aleyasen, Andy Vuong, Karrie Karahalios, Kevin Hamilton, and Christian Sandvig. 2015. "I always assumed that I wasn't really that close to [her]": Reasoning about Invisible Algorithms in News Feeds (CHI '15). In *Proceedings of the 33rd Annual ACM Conference on Human Factors in Computing Systems*. Association for Computing Machinery, New York, NY, USA, 153–162. doi:10.1145/2702123.2702556

[23] Saad Hassan, Caluá De Lacerda Pataca, Laleh Nourian, Garrett W. Tigwell, Briana Davis, and Will Zhenya Silver Wagman. 2024. Designing and Evaluating an Advanced Dance Video Comprehension Tool with In-situ Move Identification Capabilities. In *Proceedings of the 2024 CHI Conference on Human Factors in Computing Systems (CHI '24)*. Association for Computing Machinery, New York, NY, USA. doi:10.1145/3613904.3642710

[24] John Herrman. 2019. *How TikTok is Rewriting the World*. <https://www.nytimes.com/2019/03/10/style/what-is-tik-tok.html>

[25] Marius Kaminskas and Derek Bridge. 2016. Diversity, Serendipity, Novelty, and Coverage: A Survey and Empirical Analysis of Beyond-Accuracy Objectives in Recommender Systems. *ACM Trans. Interact. Intell. Syst.* 7, 1, Article 2 (Dec. 2016), 42 pages. doi:10.1145/2926720

[26] Nadia Karizat, Dan Delmonaco, Motaahhare Eslami, and Nazanin Andalibi. 2021. Algorithmic Folk Theories and Identity: How TikTok Users Co-Produce Knowledge of Identity and Engage in Algorithmic Resistance. *Proc. ACM Hum.-Comput. Interact.* 5, CSCW2, Article 305 (Oct. 2021), 44 pages. doi:10.1145/3476046

[27] Daniel Klug, Yilun Qin, Morgan Evans, and Geoff Kaufman. 2021. Trick and Please: A Mixed-Method Study On User Assumptions About the TikTok Algorithm. In *Proceedings of the 13th ACM Web Science Conference 2021*. Association for Computing Machinery, New York, NY, USA, 84–92. doi:10.1145/3447535.3462512

[28] Angela Y. Lee, Hannah Mieczkowski, Nicole B. Ellison, and Jeffrey T. Hancock. 2022. The Algorithmic Crystal: Conceptualizing the Self through Algorithmic Personalization on TikTok. *Proc. ACM Hum.-Comput. Interact.* 6, CSCW2, Article 543 (Nov. 2022), 22 pages. doi:10.1145/3555601

[29] Yunxin Li, Xinyu Chen, Baotian Hu, and Min Zhang. 2024. LLMs Meet Long Video: Advancing Long Video Question Answering with An Interactive Visual Adapter in LLMs. *arXiv preprint* (2024). doi:10.48550/arXiv.2402.13546

[30] Zhuqi Li, Yaxiong Xie, Ravi Netravali, and Kyle Jamieson. 2023. Dashlet: Taming swipe uncertainty for robust short video streaming. In *20th USENIX Symposium on Networked Systems Design and Implementation (NSDI 23)*. USENIX Association.

[31] Jing Liu, Sihan Chen, Xingjian He, Longteng Guo, Xinxin Zhu, Weineng Wang, and Jinhui Tang. 2025. VALOR: Vision-Audio-Language Omni-Perception Pretraining Model and Dataset. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 47, 2 (2025), 708–724. doi:10.1109/TPAMI.2024.3479776

[32] Xin Lu, Xin Kang, Shun Nishide, and Fuji Ren. 2019. Object detection based on SSD-ResNet. In *2019 IEEE 6th International Conference on Cloud Computing and Intelligence Systems (CCIS)*. IEEE. doi:10.1109/CCIS48116.2019.9073753

[33] Samuel Mayworm, Michael Ann DeVito, Daniel Delmonaco, Hibby Thach, and Oliver L. Haimson. 2024. Content Moderation Folk Theories and Perceptions of Platform Spirit among Marginalized Social Media Users. *Trans. Soc. Comput.* 7, 1–4, Article 1 (March 2024), 27 pages. doi:10.1145/3632741

[34] Nora Mcdonald, John S. Seberger, and Afshaneh Razi. 2024. For Me or Not for Me? The Ease With Which Teens Navigate Accurate and Inaccurate Personalized Social Media Content. In *Proceedings of the 2024 CHI Conference on Human Factors in Computing Systems (CHI '24)*. Association for Computing Machinery, New York, NY, USA, Article 904, 7 pages. doi:10.1145/3613904.3642297

[35] M.L. Menéndez, J.A. Pardo, L. Pardo, and M.C. Pardo. 1997. The Jensen-Shannon divergence. *Journal of the Franklin Institute* (1997). doi:10.1016/S0016-0032(96)00063-4

[36] Sepehr Mousavi, Krishna P. Gummadi, and Savvas Zannettou. 2024. Auditing Algorithmic Explanations of Social Media Feeds: A Case Study of TikTok Video Explanations. In *Proceedings of the International AAAI Conference on Web and Social Media (ICWSM '24)*. doi:10.1609/icwsm.v18i1.31376

[37] Shi Na, Liu Xumin, and Guan Yong. 2010. Research on k-means Clustering Algorithm: An Improved k-means Clustering Algorithm. In *2010 Third International Symposium on Intelligent Information Technology and Security Informatics*. doi:10.1109/ITSI.2010.74

[38] Lynnette Hui Xian Ng, John Yeh Han Tan, Darryl Jing Heng Tan, and Roy Ka-Wei Lee. 2022. Will you dance to the challenge? predicting user participation of TikTok challenges. In *The 2021 IEEE/ACM International Conference on Advances in Social Networks Analysis and Mining*. Association for Computing Machinery, New York, NY, USA. doi:10.1145/3487351.3488276

[39] Stefan Palan and Christian Schitter. 2018. Prolific.ac—A subject pool for online experiments. *Journal of Behavioral and Experimental Finance* 17 (2018).

[40] Emilee Rader and Rebecca Gray. 2015. Understanding User Beliefs About Algorithmic Curation in the Facebook News Feed. In *Proceedings of the 33rd Annual ACM Conference on Human Factors in Computing Systems (CHI '15)*. Association for Computing Machinery, New York, NY, USA, 173–182. doi:10.1145/2702123.2702174

[41] Jack Shepherd. 2025. *25 Essential TikTok Statistics You Need to Know in 2025*. <https://thesocialshepherd.com/blog/tiktok-statistics>

[42] Li Sun, Haoqi Zhang, Songyang Zhang, and Jiebo Luo. 2020. Content-based Analysis of the Cultural Differences between TikTok and Douyin. In *2020 IEEE International Conference on Big Data (Big Data)*. doi:10.1109/BigData50022.2020.9378032

[43] David Teather. 2024. *TikTokAPI*. <https://github.com/davidteather/tiktok-api>

[44] TikTok. [n. d.]. <https://www.tiktok.com/@lorenasad>. Accessed January 2026.

[45] TikTok. 2021. <https://www.tiktok.com/@notyourleidy/video/6973468224889392389>. Accessed January 2026.

[46] TikTok. 2023. https://www.tiktok.com/@neurolab_/video/7262793257174781217. Accessed January 2026.

[47] TikTok. 2023. <https://www.tiktok.com/@socialmediamoney/video/7262479984025980165>. Accessed January 2026.

[48] TikTok. 2023. <https://www.tiktok.com/@kindasortasimple/video/7225971694245104939>. Accessed January 2026.

[49] TikTok. 2023. <https://www.tiktok.com/@joinsideplus/video/7248981972222004507>. Accessed January 2026.

[50] TikTok. 2023. https://www.tiktok.com/_@_miaundrea/video/7220937875582405893. Accessed January 2026.

[51] TikTok. 2023. <https://www.tiktok.com/@nightwing7974/video/7287315719098780970>. Accessed January 2026.

[52] TikTok. 2024. <https://www.tiktok.com/@bestviral5/video/7354841006287768865>. Accessed January 2026.

[53] TikTok. 2024. <https://www.tiktok.com/@sodakhtar/video/7407612933980638495>. Accessed January 2026.

[54] TikTok. 2024. <https://www.tiktok.com/@thereal.ceyana/video/7333773698161265963>. Accessed January 2026.

[55] TikTok. 2024. <https://www.tiktok.com/@hey.itsbel/video/7254752968451362054>. Accessed January 2026.

[56] TikTok. 2024. <https://www.tiktok.com/@calebhammercomposer/video/7392259053235326251>. Accessed January 2026.

[57] TikTok. 2024. <https://www.tiktok.com/@stavvysworld/video/7393082396419165471>. Accessed January 2026.

[58] TikTok. 2024. https://www.tiktok.com/@ryflow_people. Accessed January 2026.

[59] TikTok. 2024. <https://www.tiktok.com/@funnykittensoftiktok>. Accessed January 2026.

- [60] TikTok. 2024. <https://www.tiktok.com/@samaraspaulding/video/7377356449468534034>. Accessed January 2026.
- [61] TikTok. 2024. <https://www.tiktok.com/@csyrd/video/7353215252621806865>. Accessed January 2026.
- [62] Julie A. Vera and Sourajit Ghosh. 2025. "They've Over-Emphasized That One Search": Controlling Unwanted Content on TikTok's For You Page. In *Proceedings of the 2025 CHI Conference on Human Factors in Computing Systems (CHI '25)*. Association for Computing Machinery, New York, NY, USA, Article 221, 8 pages. doi:10.1145/3706598.3713666
- [63] Karan Vombatkere, Sepehr Mousavi, Savvas Zannettou, Franziska Roesner, and Krishna P. Gummadi. 2024. TikTok and the Art of Personalization: Investigating Exploration and Exploitation on Social Media Feeds. In *Proceedings of the ACM Web Conference 2024 (WWW '24)*. Association for Computing Machinery, New York, NY, USA. doi:10.1145/3589334.3645600
- [64] Huachen Wang, Minzhu Zhao, Wanyang Hu, Yuxin Ma, and Zhicong Lu. 2024. Critical Heritage Studies as a Lens to Understand Short Video Sharing of Intangible Cultural Heritage on Douyin. In *Proceedings of the 2024 CHI Conference on Human Factors in Computing Systems (CHI '24)*. Association for Computing Machinery, New York, NY, USA, Article 613, 21 pages. doi:10.1145/3613904.3642138
- [65] Wen-Fan Wang, Chien-Ting Lu, Nil Ponsa i Campanyà, Bing-Yu Chen, and Mike Y. Chen. 2025. Aldeation: Designing a Human-AI Collaborative Ideation System for Concept Designers. In *Proceedings of the 2025 CHI Conference on Human Factors in Computing Systems (CHI '25)*. Association for Computing Machinery, New York, NY, USA, Article 21, 28 pages. doi:10.1145/3706598.3714148
- [66] Svante Wold, Kim Esbensen, and Paul Geladi. 1987. Principal component analysis. *Chemometrics and Intelligent Laboratory Systems* 2, 1 (1987), 37–52. *Proceedings of the Multivariate Statistical Workshop for Geologists and Geochemists*. doi:10.1016/0169-7439(87)80084-9
- [67] Savvas Zannettou, Olivia Nemes-Nemeth, Oshrat Ayalon, Angelica Goetzen, Krishna P. Gummadi, Elissa M. Redmiles, and Franziska Roesner. 2024. Analyzing User Engagement with TikTok's Short Format Video Recommendations using Data Donations. In *Proceedings of the 2024 CHI Conference on Human Factors in Computing Systems (CHI '24)*. Association for Computing Machinery, New York, NY, USA, Article 731, 16 pages. doi:10.1145/3613904.3642433
- [68] Ruohan Zhan, Changhua Pei, Qiang Su, Jianfeng Wen, Xueliang Wang, Guanyu Mu, Dong Zheng, Peng Jiang, and Kun Gai. 2022. Deconfounding Duration Bias in Watch-time Prediction for Video Recommendation. In *The 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining (KDD '22)*. Association for Computing Machinery, New York, NY, USA, 4472–4481. doi:10.1145/3534678.3539092
- [69] Hang Zhang, Xin Li, and Lidong Bing. 2023. Video-LLaMA: An instruction-tuned audio-visual language model for video understanding. *arXiv preprint* (2023). 10.48550/arXiv.2306.02858
- [70] Songyang Zhang, Tolga Aktas, and Jiebo Luo. 2021. Mi YouTube es Su YouTube? Analyzing the Cultures using YouTube Thumbnails of Popular Videos. In *2021 IEEE International Conference on Big Data (Big Data)*. doi:10.1109/BigData52589.2021.9672037
- [71] Cai-Nicolas Ziegler, Sean M. McNee, Joseph A. Konstan, and Georg Lausen. 2005. Improving recommendation lists through topic diversification. In *Proceedings of the 14th International Conference on World Wide Web (WWW '05)*. Association for Computing Machinery, New York, NY, USA, 22–32. doi:10.1145/1060745.1060754

Appendix

Additional User Study Details

Snapshots of materials from the study are placed in Figs. 16 and 17. In Table 8, we list the different questions that we asked our participants at the end of both sessions along with the corresponding Likert scales used to record responses.

8 Cluster Descriptions

The descriptions of the 100 abstract clusters (when we are reasonably able to infer) that we created via KMeans are listed below:

- (1) Videos of people gathering at events such as sports matches and concerts
- (2) Videos of influencers interviewing other people on the streets
- (3) Videos of influencers asking questions to their audience with text displayed on screen

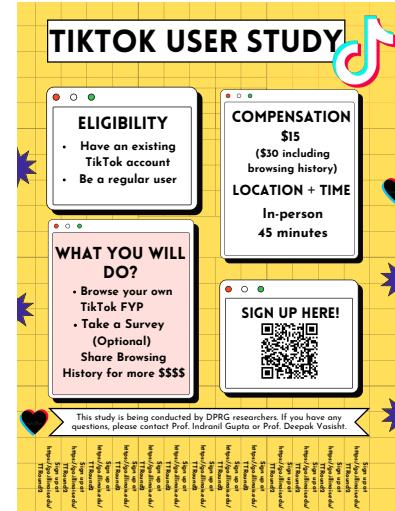


Figure 16: The poster we utilized to recruit participants for our in-person user study. This poster was placed in various buildings, coffee shops and restaurants on our university campus.

- (4) Videos of influencers trying new clothes and reviewing outfit fits
- (5) Advertisements from companies
- (6) A single male influencer trying a new product and explaining his experience
- (7) Videos of people sharing emotional moments with their family
- (8) Videos of people using appliances
- (9) People displaying their daily routines
- (10) Videos of people reacting to news articles and other videos on the internet
- (11) Videos of people at restaurants serving food
- (12) Videos of people traveling to forests and beaches
- (13) Videos of a single female influencer giving advice
- (14) "Get Ready With Me" videos by female influencers
- (15) Clippings from reality shows and movies
- (16) Female influencers working out at the gym
- (17) Clippings from movies with dramatic background music
- (18) Videos of cats and kittens
- (19) Videos of people unboxing products and reviewing them, with no person on screen
- (20) Videos of people at music concerts
- (21) Videos of people singing songs with lyrics emphasized on screen
- (22) TV show clips where the video does not occupy the full frame
- (23) Videos of women talking about their relationships and friendships
- (24) Clippings featuring popular celebrities
- (25) Videos of people commenting on celebrities' outfits or posts
- (26) Videos featuring the sky
- (27) Videos of male influencers sharing realizations
- (28) Unclear

Question	Scale
I was more engaged by session ____.	1 – Session 1; 7 – Session 2
In session ____, I saw videos that were closer to the kinds of videos I normally saw in my past TikTok viewing.	1 – Session 1; 7 – Session 2
I was more satisfied by session ____.	1 – Session 1; 7 – Session 2
I was more absorbed in session ____.	1 – Session 1; 7 – Session 2
I felt more frustrated in session ____.	1 – Session 1; 7 – Session 2
I found my experience more rewarding in session ____.	1 – Session 1; 7 – Session 2
I felt more interested in session ____.	1 – Session 1; 7 – Session 2
Rate session 1 based on the content quality of the videos you saw.	1 – Very dissatisfied; 7 – Satisfied
Rate session 2 based on the content quality of the videos you saw.	1 – Very dissatisfied; 7 – Satisfied
Rate session 1 based on network conditions or technical issues.	1 – Very poor; 7 – Excellent
Rate session 2 based on network conditions or technical issues.	1 – Very poor; 7 – Excellent
How engaging was session 1 for you?	1 – Very boring; 7 – Very engaging
How engaging was session 2 for you?	1 – Very boring; 7 – Very engaging

Table 8: User study questions and corresponding response scales for Part 1.



TikTok User Study

By illinois.edu

• \$15.00 • \$30.00/hr • 30 mins • 102 places

In this study, you will browse your own TikTok for 2 sessions of 10 minutes each while enabling our extension. You will then answer some questions about your experience. This is a two part study and in the second part, you can donate your anonymized TikTok browsing history and activity data for an additional \$15 compensation.

Please note that this study requires the use of Google Chrome and involves installing our browser extension from the Chrome Web Store. You will also need to be logged into your own TikTok account on the browser.

(a) Part 1: Browsing sessions.



TikTok Browsing History Donation

By illinois.edu

• \$15.00 • \$60.00/hr • 15 mins • 72 places

This is part 2 of our TikTok User Study. In this part, you will be prompted to upload the browsing and activity history that TikTok allows you to download through your account. You only need to upload this file for an additional \$15 compensation. Please request your browsing history files from TikTok and have them ready for download before beginning this survey. Note that these files are anonymized, not traceable to you, and do not give us any more information than what is meant.

Here is a video walking through this part of the study: <https://go.illinois.edu/TTStudyPart2> (If you see this video and use the web browser to request data, you can skip the rest of the instructions!)

(b) Part 2: Activity data donation.

Figure 17: Snapshot of our two-part online user study on Prolific.

- (29) Videos of people building products from scratch
- (30) Videos of female influencers reacting to comments
- (31) Videos of friends hanging out together
- (32) Videos of people making dishes and sharing recipes

- (33) Videos of pop artists hanging out together
- (34) “POV” videos explaining a situation
- (35) Videos with dramatic audio and bold white text displayed on screen
- (36) *Unclear*
- (37) Videos titled “Pop culture moments we don’t talk enough about”
- (38) Videos featuring K-pop artists
- (39) Clippings from K-pop music videos
- (40) Videos of influencers talking about their favorite food
- (41) Women performing trends and dances in corridors
- (42) Videos from basketball matches
- (43) Videos of female influencers stating preferences with white text displayed on screen
- (44) Videos of football matches where the video does not occupy the full frame
- (45) Make-up and hair tutorials by female influencers
- (46) Videos of one person holding a microphone and interviewing others
- (47) Screen recordings of YouTube videos or messages
- (48) Podcast clips
- (49) Videos of cats and dogs with their pet parents
- (50) Videos of female influencers giving relationship advice
- (51) Videos of women looking at the camera as if it were a mirror and fixing their hair
- (52) Videos of women sitting in cars and talking about topics
- (53) *Unclear*
- (54) Videos of male influencers reacting to other websites and news articles
- (55) Videos of one or more girls performing a popular trend
- (56) Advertisements from food companies
- (57) Minecraft gameplay videos
- (58) *Unclear*
- (59) Videos of people exploring cafés and restaurants
- (60) Videos of male influencers talking about a specific topic
- (61) Videos featuring clothing products
- (62) Videos featuring babies and toddlers
- (63) “POV” and realization videos featuring movie scenes
- (64) Romantic videos of couples

- (65) Make-up and hair tutorials featuring specific products
- (66) *Unclear*
- (67) Clippings of cartoons and animated movies
- (68) Aesthetic cooking videos with no visible chef
- (69) Videos of female influencers reacting to comments in foreign languages
- (70) Videos sharing Reddit stories
- (71) Videos labeled as “Stitch”
- (72) Advertisements by technology companies
- (73) Clippings from talk shows and newsrooms
- (74) Movie clips occupying only a small region of the frame
- (75) Videos of people during their vacations
- (76) Minecraft videos combined with reactions to Reddit posts
- (77) *Unclear*
- (78) Videos of people showcasing achievements and important moments
- (79) Videos of crowds enjoying concerts
- (80) Videos from TikTok Research
- (81) Videos of women discussing controversial topics while in their cars
- (82) Split-screen videos with unrelated content
- (83) *Unclear*
- (84) Videos where people enact skits
- (85) Celebrity interview clips not occupying the full frame
- (86) Videos in foreign languages
- (87) Videos of people pranking others
- (88) Videos of male pop artists performing
- (89) Cartoon clips with white text displayed over them
- (90) *Unclear*
- (91) DIY videos where people organize their homes
- (92) Videos where influencers question their actions
- (93) Funny videos of cats and dogs with their pet parents
- (94) *Unclear*
- (95) Clippings from very famous music videos
- (96) “Day in the life” videos
- (97) *Unclear*
- (98) Videos with vertically split screens showing unrelated content
- (99) Videos of people reacting to controversial user comments
- (100) Videos filmed in homes or bedrooms